

FILE: 2021-D01\ULO

REV

E.C.N NO.

CONTENT

CHK

DATE

NOTES1:

UL Standard

1. Rating voltage/current: 300V/20A
2. withstanding voltage: AC2000V/1Min
3. Wire range: 30~12AWG

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	250V
Rate Current(A)	24A
2. wire range: 0.5-2.5mm²

NOTES2:

1. Housing: PA66(UL94 V-0)
2. Block: Steel(Zn Plated)
3. Cage: Steel(M2.5/Zn Plated)
4. Screw: Steel(M2.5/Zn Plated)
5. Cover: PA66(UL94 V-0)
6. Pin header: Copper(Sn Plated)

NOTES3:

1. Pitch: 5.0mm Poles: 02-24P
2. Operating temperature: -40℃~+105℃
3. RoHS Compliance





How to order

ULO-TB71 - 105V/5.0 - XXP - Y 0 0 0 A

Certificate Series NO. Factory Code poles Customer requirements

color:

- | | |
|----------|---------------|
| 1:Grey | 6:Red |
| 2:Blue | 7:transparent |
| 3:Black | 8:Yellow |
| 4:Green | 9:White |
| 5:Orange | |

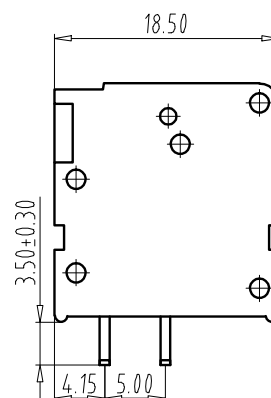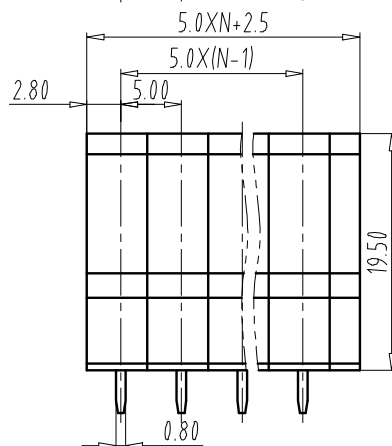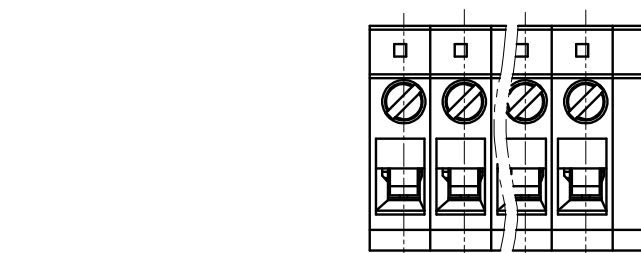

A	Total Pitch Tolerances in mm										Nominal dimension range in mm										$\perp$		$\equiv$	$-$	$//$	
	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 300	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 300	over 320	over 10	over 10		over 0	over 100	over 150
	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 300	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10			all	to 100	to 150	
	± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.55	± 0.70	± 0.75	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.2	0.3	0.5		

ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL		NOTE	
DWG.	LZW	DATE	21.05.27	UNITS	MM	SHEET/OF		1 / 1
CHK.		DATE		SCALE	1 : 1	A4		
APP.		DATE			NAME ULO-TB71-105V/5.0-XXP-Y000A			
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司								
				DWGNO.	ULOTB71Y000A			