
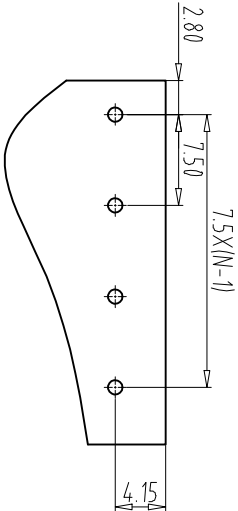
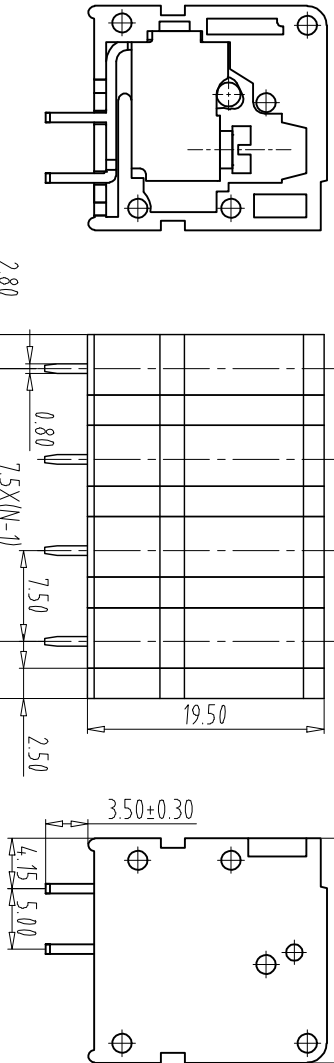


FILE: 2021-D01VUL0

REV	EC.N NO.	CONTENT	CHK	DATE

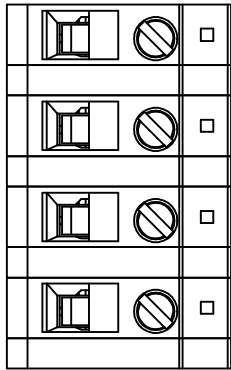

NOTES1:
UL Standard
1. Use group: B, C, D
Rated Current: 20A - 10A
Rated Voltage: 300V - 300V
2. Wire range: 30~12AWG
IEC Standard

Pollution Degree	2
Overvoltage Category	II
Rated Impulse Voltage(kV)	4kV
Rated Voltage(V)	250V
Rated Current(A)	24A

NOTES2:
1.Housing: PA66(UL94V-0)
2.Block: Steel(Zn Plated)
3.Cage: Steel(M2.5/Zn Plated)
4.Screw: Steel(M2.5/Zn Plated)
5.Cover: PA66(UL94V-0)
6.Pin header: Copper(Sn Plated)

NOTES3:

1.Pitch: 7.5mm Poles: 02-24P
2.Operating temperature: -40℃~+105℃
3.RoHS Compliance

How to order
UL0-TB75 - 105V/7.5 - XXP - Y 0 0 0 A
Certificate Factory poles
Series NO. Code

Customer requirements
color:
1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

Total Pitch Tolerances										Nominal dimension range										—	//
in mm										in mm											
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over		
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over		
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	0	100
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100	to	150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.2	0.3
6									5									4			0.5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.05.27	UNITS	MM
CHK.	DATE	SCALE	1 : 1	SHEET/OF	A4
APP.	DATE	NAME	UL0-TB75-105V/7.5-XXP-1000A		
NINGBO UL0 ELECTRONICS CO.,LTD.			DWGNO.	UL0TB75Y000A	