
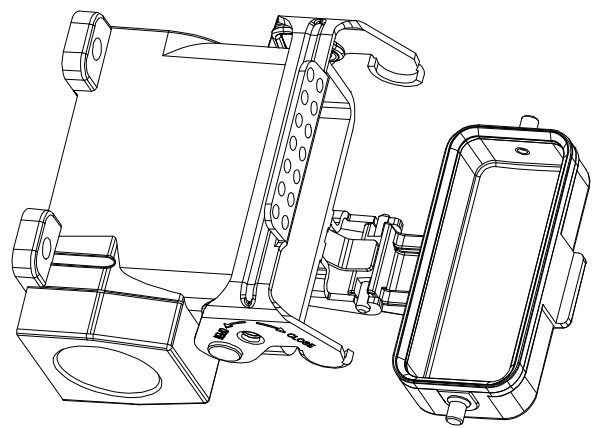


REV	E.C.N NO.	CONTENT	CHK	DATE
		Type	Thread size (M/Pg)	
		ULO-HC02-H10A-SF-1L-CV-M20	M20	
		ULO-HC02-H10A-SF-1L-CV-M25	M25	
		ULO-HC02-H10A-SF-1L-CV-PG16	PG16	
		ULO-HC02-H10A-SF-1L-CV-PG21	PG21	
		ULO-HC02-H10A-SF-1L-MCV-M20	M20	
		ULO-HC02-H10A-SF-1L-MCV-M25	M25	
		ULO-HC02-H10A-SF-1L-MCV-PG16	PG16	
		ULO-HC02-H10A-SF-1L-MCV-PG21	PG21	

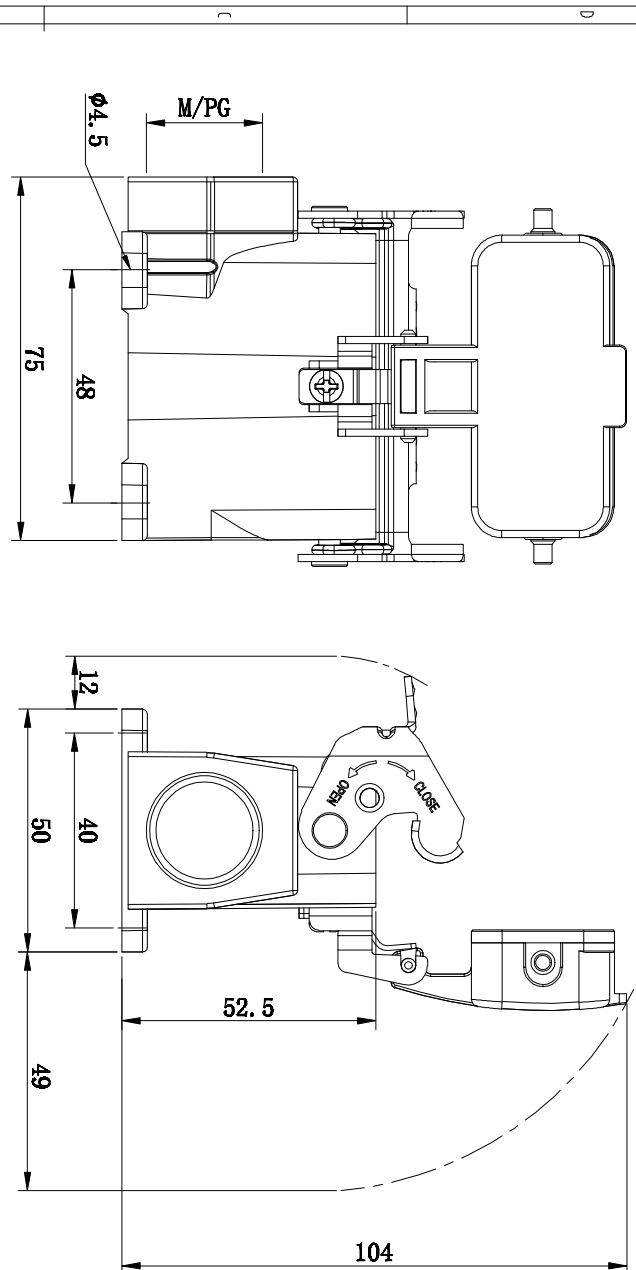

- Technical specification:
1. Material: Aluminium die-cast
 2. Materia, coverl: PC /Aluminium die-cast
 3. Surface: powder-coated
 4. Colour: (grey)
 5. Temperature range: -40℃ - +125℃
 6. Degree of Protection: IP65
(acc. to IEC 60529 for coupled connector)
 7. Locking element:
locking type:single locking latch
material: metal galvanizing/nickel plating
 8. Cable entry: side entry
 9. Thread size: M/Pg

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.9	UNITS	MM
CHK.	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	ULO-HC02-H10A-SF-1L-CV-MCV-XX		

NINGBO ULO ELECTRONICS CO.,LTD.
宁波欧路电子有限公司

DWGNO.