
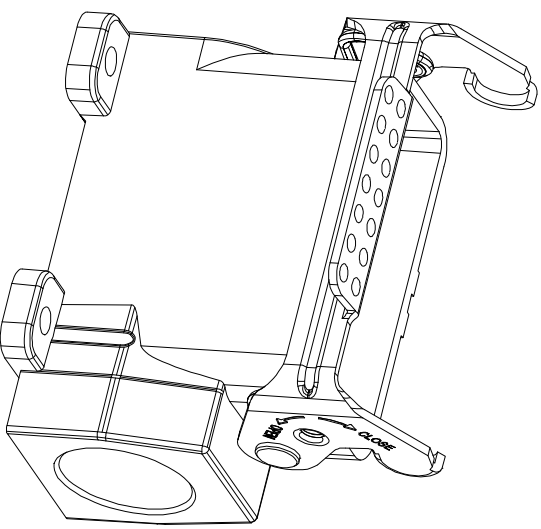


REV	E.C.N NO.	CONTENT	CHK	DATE
Type			Thread size (M/PG)	
ULO-HC02-H10A-SF-1L-M20			M20	
ULO-HC02-H10A-SF-1L-M25			M25	
ULO-HC02-H10A-SF-1L-PG16			PG16	
ULO-HC02-H10A-SF-1L-PG21			PG21	

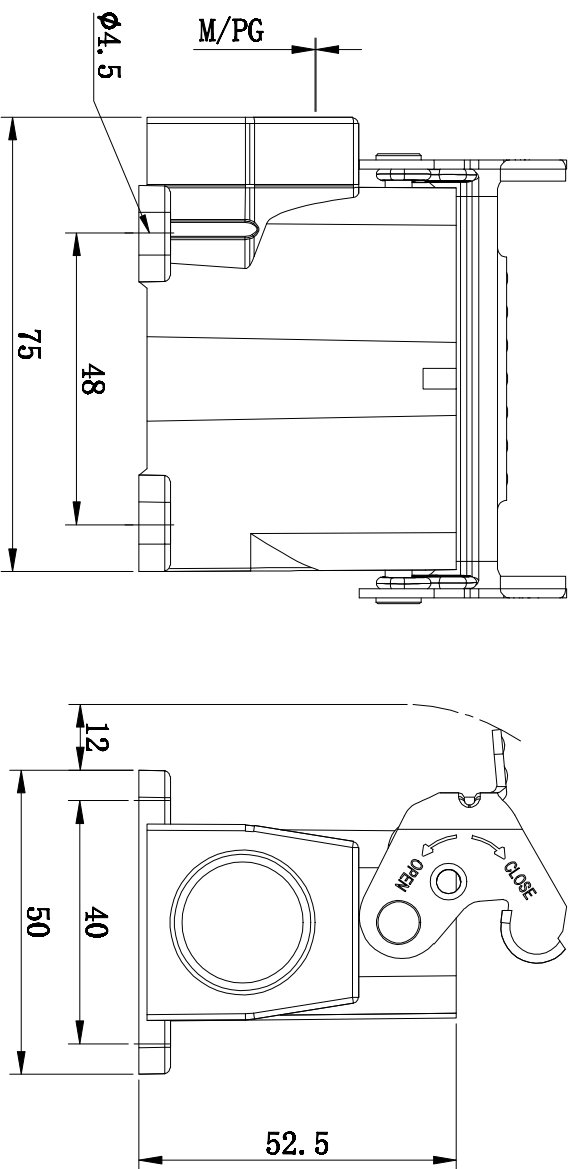

- Technical specification:
1. Material: Aluminium die-cast
 2. Surface: powder-coated
 3. Colour: (grey)
 4. Temperature range: -40℃ - +125℃
 5. Degree of Protection: IP65
(acc. to IEC 60529 for coupled connector)
 6. Locking element:
locking type:single locking latch
material: metal galvanized/nickel
plating
 7. Cable entry: side entry
 8. Thread size: M/PG

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE	
DWG.	SWL	DATE	2023.12.9	UNITS	MM	SHEET/OF 1/1
CHK.	DATE	DATE		SCALE	1:1	A4
APP.	DATE	DATE		NAME	ULO-HC02-H10A-SF-1L-XX	

NINGBO ULO ELECTRONICS CO., LTD.
宁波欧路电子有限公司

DWGNO.