



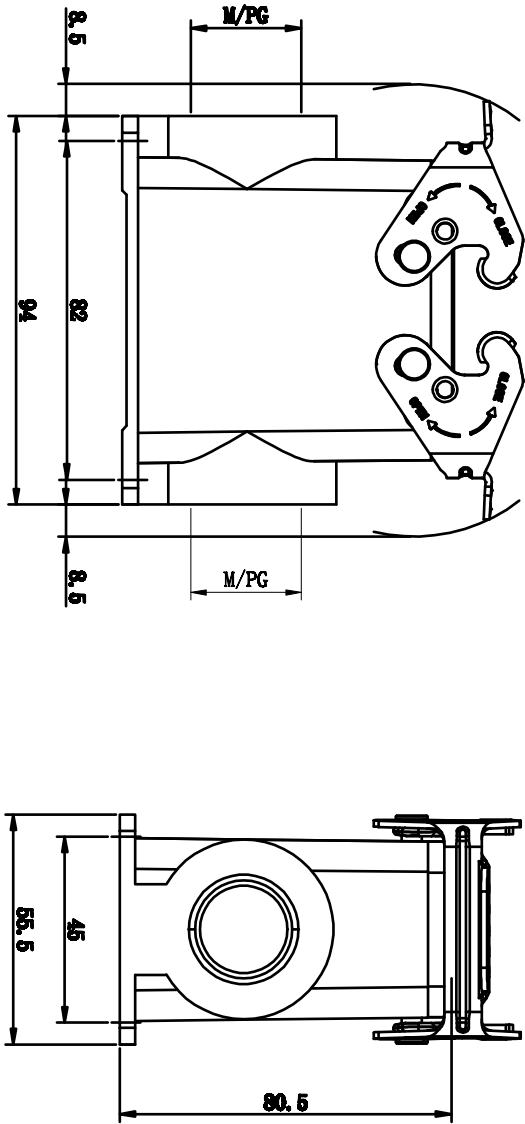

REV	E.C.N NO.	CONTENT	CHK	DATE
		Type	Thread size (M/PG)	
		UL0-HC06-H10B-SFH-2L-M25	M25	
		UL0-HC06-H10B-SFH-2L-2M25	2M25	
		UL0-HC06-H10B-SFH-2L-M32	M32	
		UL0-HC06-H10B-SFH-2L-2M32	2M32	
		UL0-HC06-H10B-SFH-2L-PG21	PG21	
		UL0-HC06-H10B-SFH-2L-2PG21	2PG21	
		UL0-HC06-H10B-SFH-2L-PG29	PG29	
		UL0-HC06-H10B-SFH-2L-2PG29	2PG29	

Technical specification:

1. Material: Aluminium die-cast
2. Surface: powder-coated
3. Colour: (grey)
4. Temperature range: -40℃ - +125℃
5. Degree of Protection: IP65
(acc. to IEC 60529 for coupled connector)
6. Locking element:
locking type: double locking latch
material: metal galvanized/nickel plating
7. Cable entry: side entry
8. Thread size: M/PG
9. Hoods/Housings sealing: NBR

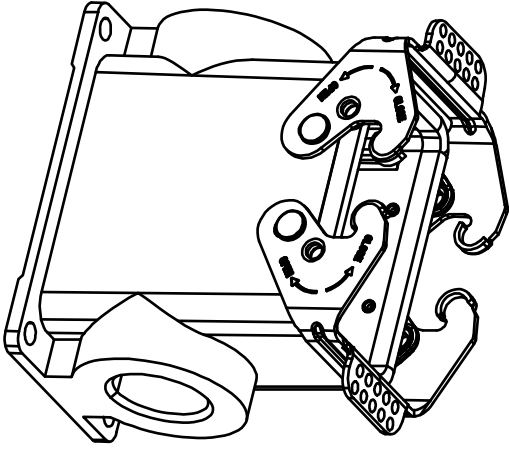

ITEM	NAME OF PART		NO. OF PART	Q'TY	MATERIAL		NOTE
DWG.	SWL	DATE	2023.12.9	UNITS	MM	SHEET/OF	1/1
CHK.		DATE		SCALE	1:1	A4	
APP.		DATE		NAME			
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司				UL0-HC06-H10B-SFH-2L-XX			
				DWGNO			