



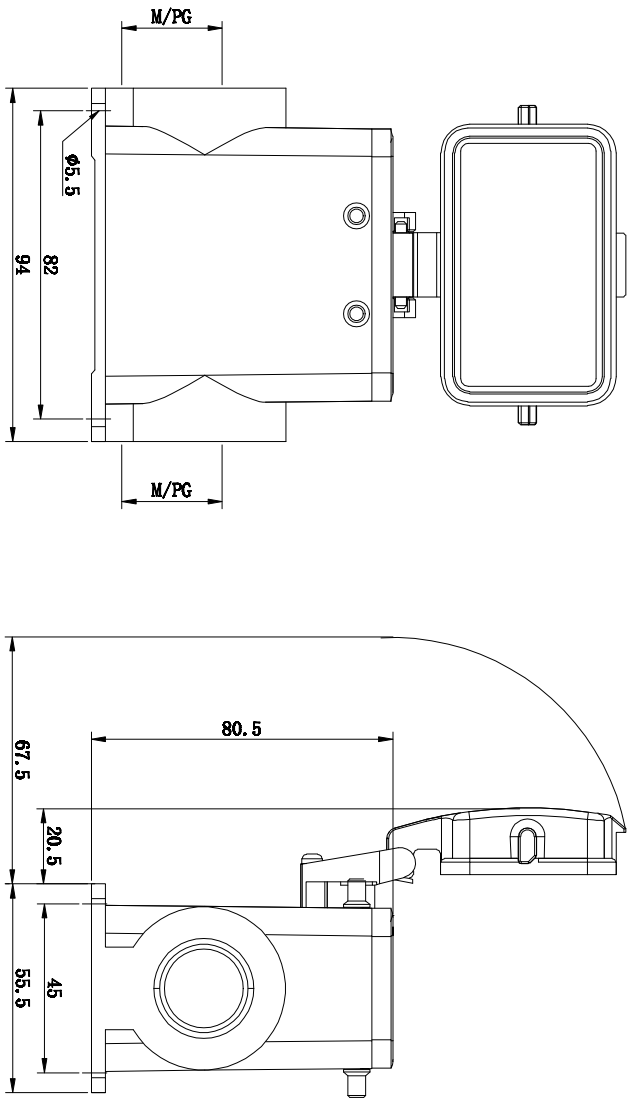

Type	Thread size (M/Pg)
UL0-HC06-H10B-SFH-4B-MCV-M25	M25
UL0-HC06-H10B-SFH-4B-MCV-2M25	2M25
UL0-HC06-H10B-SFH-4B-MCV-M32	M32
UL0-HC06-H10B-SFH-4B-MCV-2M32	2M32
UL0-HC06-H10B-SFH-4B-MCV-PG21	PG21
UL0-HC06-H10B-SFH-4B-MCV-2PG21	2PG21
UL0-HC06-H10B-SFH-4B-MCV-PG29	PG29
UL0-HC06-H10B-SFH-4B-MCV-2PG29	2PG29

Technical specification:

1. Material: Aluminium die-cast
2. Materia, coverl: Aluminium die-cast
3. Surface: powder-coated
4. Colour: (grey)
5. Temperature range: -40℃ - +125℃
6. Degree of Protection: IP65 (acc. to IEC 60529 for coupled connector)
7. Cable entry: side entry
8. Thread size: M/Pg
9. Hoods/Housings sealing: NBR

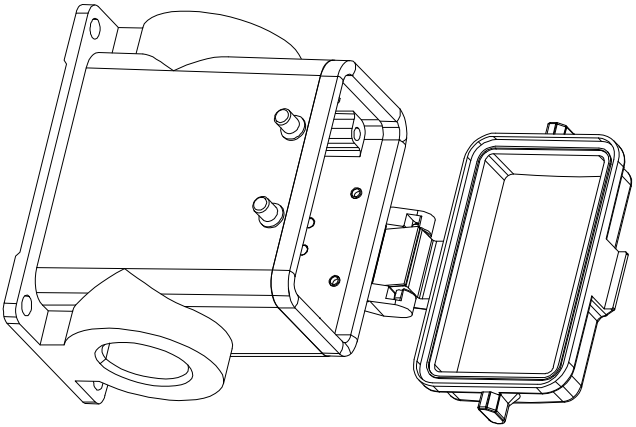

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.21	UNITS	MM
CHK.	DATE	DATE	SCALE	1:1	A4
APP.	DATE	DATE	NAME	UL0-HC06-H10B-SFH-4B-MCV-2M32	
			NINGBO UL0 ELECTRONICS CO.,LTD.		
			宁波欧路电子有限公司		
			DWGNO.		