



REV	E.C.N NO.	CONTENT	CHK	DATE
Type			Thread size (M/Pg)	
ULO-HC06-H10B-SFH-4B-CV-M25			M25	
ULO-HC06-H10B-SFH-4B-CV-2M25			2M25	
ULO-HC06-H10B-SFH-4B-CV-M32			M32	
ULO-HC06-H10B-SFH-4B-CV-2M32			2M32	
ULO-HC06-H10B-SFH-4B-CV-PG21			PG21	
ULO-HC06-H10B-SFH-4B-CV-2PG21			2PG21	
ULO-HC06-H10B-SFH-4B-CV-PG29			PG29	
ULO-HC06-H10B-SFH-4B-CV-2PG29			2PG29	

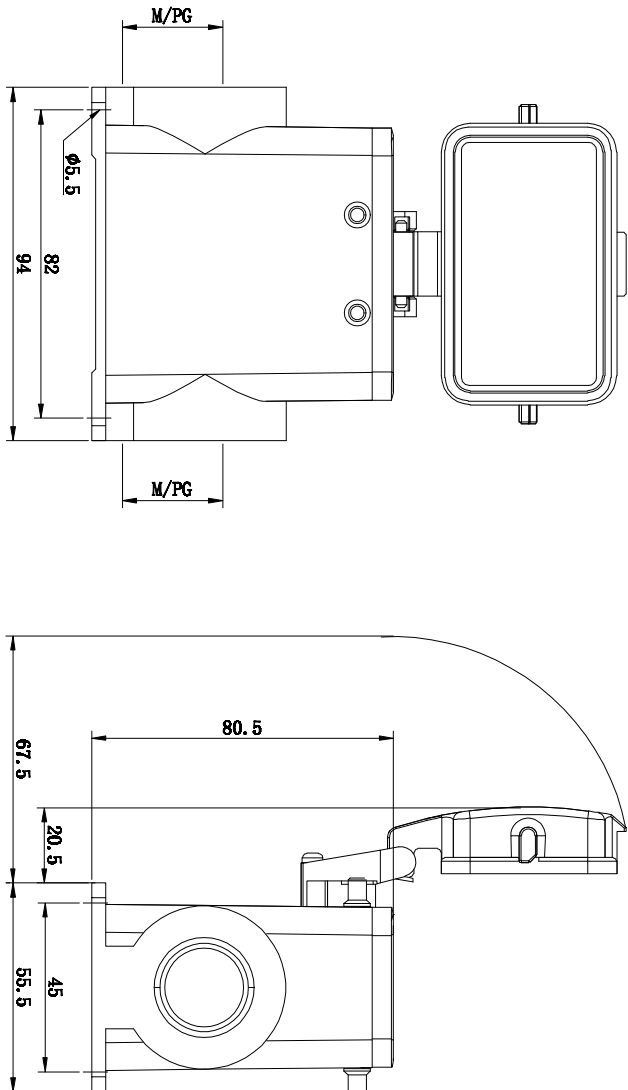

Technical specification:

1. Material: Aluminium die-cast
2. Material, coverl: PC
3. Surface: powder-coated
4. Colour: (grey)
5. Temperature range: -40℃ - +125℃
6. Degree of Protection: IP65
(acc. to IEC 60529 for coupled connector)
7. Cable entry: side entry
8. Thread size: M/Pg
9. Hoods/Housings sealing: NBR

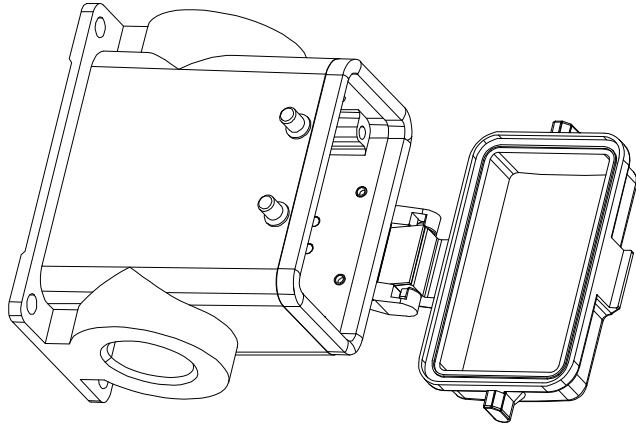

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.21	UNITS	MM
CHK.	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	ULO-HC06-H10B-SFH-4B-CV-XX		
NINGBO ULO ELECTRONICS CO.,LTD.			DWGNO.		



宁波欧路电子有限公司