
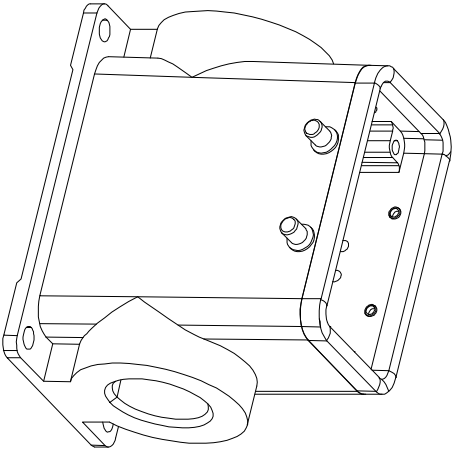


Type	Thread size (M/Pg)
ULO-HC06-H10B-SFH-4B-M25	M25
ULO-HC06-H10B-SFH-4B-2M25	2M25
ULO-HC06-H10B-SFH-4B-M32	M32
ULO-HC06-H10B-SFH-4B-2M32	2M32
ULO-HC06-H10B-SFH-4B-PG21	PG21
ULO-HC06-H10B-SFH-4B-2PG21	2PG21
ULO-HC06-H10B-SFH-4B-PG29	PG29
ULO-HC06-H10B-SFH-4B-2PG29	2PG29

Technical specification:

- Material: Aluminium die-cast
-
- Surface: powder-coated
- Colour: (grey)
- Temperature range: -40℃ - +125℃
- Degree of Protection: IP65
(acc. to IEC 60529 for coupled connector)
- Cable entry: side entry
- Thread size: M/Pg
- Hoods/Housings sealing: NBR

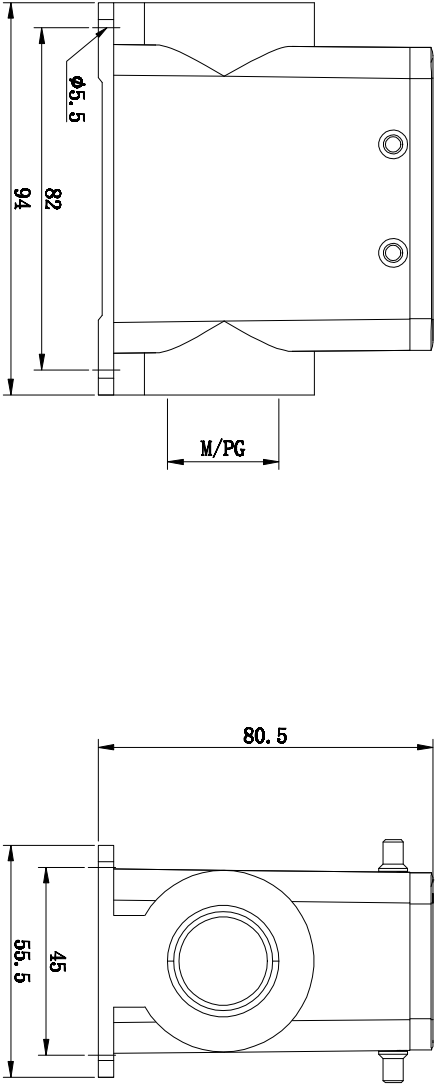

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.21	UNITS	MM
CHK.	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	ULO-HC06-H10B-SFH-4B-2X		