



| Type                      | Thread size<br>(M/PG) |
|---------------------------|-----------------------|
| UL0-HC06-H10B-SEH-2B-M20  | M20                   |
| UL0-HC06-H10B-SEH-2B-M25  | M25                   |
| UL0-HC06-H10B-SEH-2B-PG21 | PG21                  |
| UL0-HC06-H10B-SEH-2B-PG29 | PG29                  |

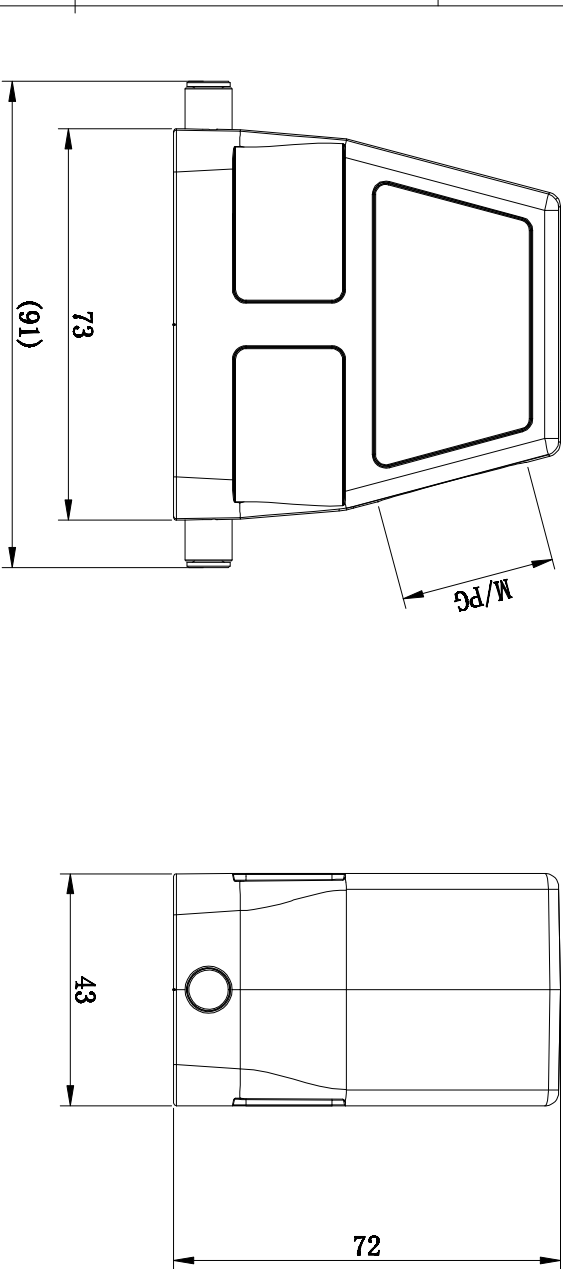

- Technical specification:**
1. Material: Aluminium die-cast
  2. Surface: powder-coated
  3. Colour: (grey)
  4. Temperature range: -40℃ - +125℃
  5. Degree of Protection: IP65  
(acc. to IEC 60529 for coupled connector)
  6. Cable entry: side entry
  7. Thread size: M/PG

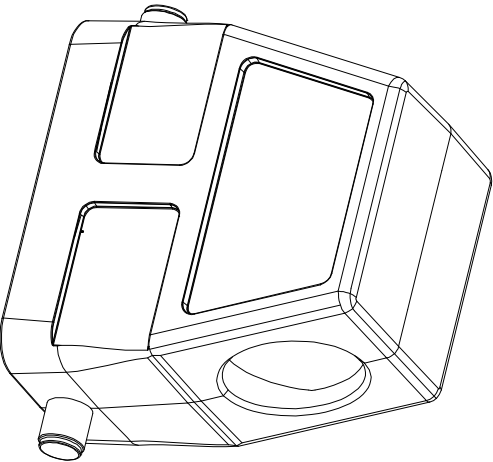

| ITEM | NAME OF PART | NO. OF PART | Q'TY                    | MATERIAL | NOTE |
|------|--------------|-------------|-------------------------|----------|------|
| DWG. | SWL          | DATE        | 2023.12.9               | UNITS    | MM   |
| CHK. | DATE         | SCALE       | 1:1                     | A4       | 1/1  |
| APP. | DATE         | NAME        | UL0-HC06-H10B-SEH-2B-XX |          |      |

NINGBO UL0 ELECTRONICS CO., LTD.  
宁波欧路电子有限公司

DWGNO.