



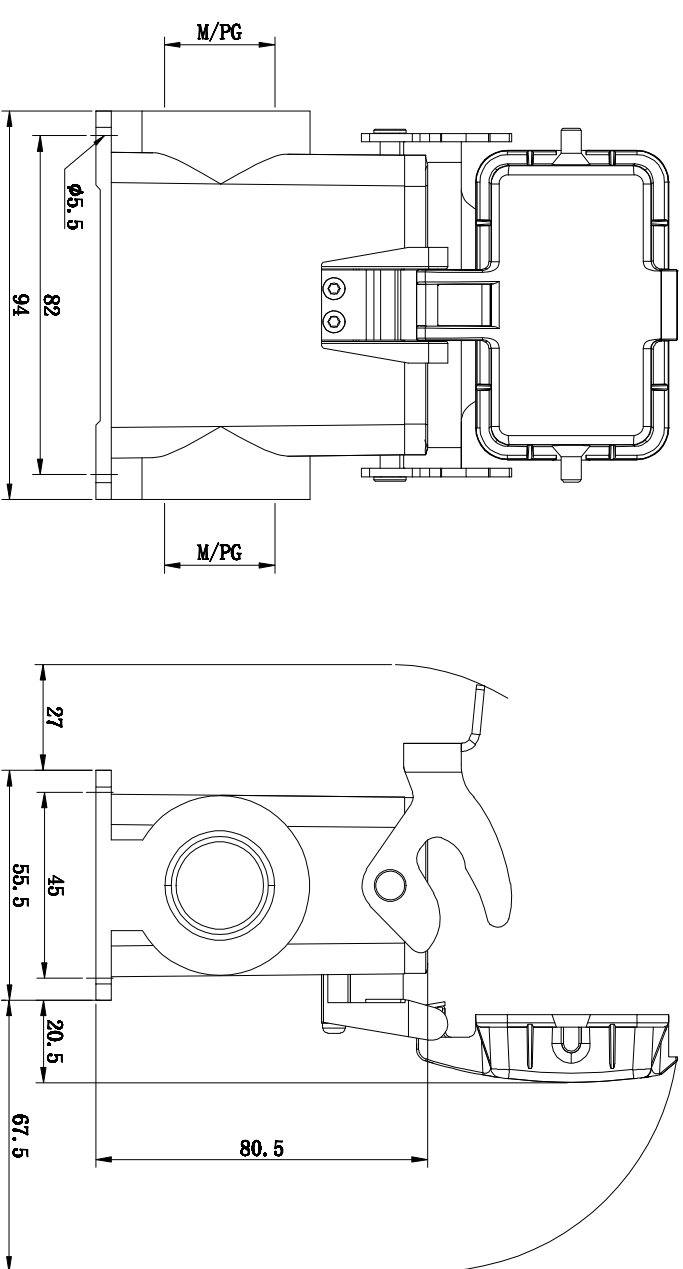

REV	E.C.N NO.	CONTENT	CHK	DATE
Type			Thread size (M/Pg)	
UL0-HC06-H10B-SFH-1L-MCV-M25			M25	
UL0-HC06-H10B-SFH-1L-MCV-2M25			2M25	
UL0-HC06-H10B-SFH-1L-MCV-M32			M32	
UL0-HC06-H10B-SFH-1L-MCV-2M32			2M32	
UL0-HC06-H10B-SFH-1L-MCV-PG21			PG21	
UL0-HC06-H10B-SFH-1L-MCV-2PG21			2PG21	
UL0-HC06-H10B-SFH-1L-MCV-PG29			PG29	
UL0-HC06-H10B-SFH-1L-MCV-2PG29			2PG29	

Technical specification:

1. Material: Aluminium die-cast
2. Materia, cover1: Aluminium die-cast
3. Surface:powder-coated
4. Colour: (grey)
5. Temperature range:-40℃ - +125℃
6. Degree of Protection: IP65
(acc. to IEC 60529 for coupled connector)
7. Locking element:
locking type:single locking latch
material: metal galvanized/nickel plating
8. Cable entry: side entry
9. Thread size: M/Pg
- 10 Hoods/Housings sealing: NBR

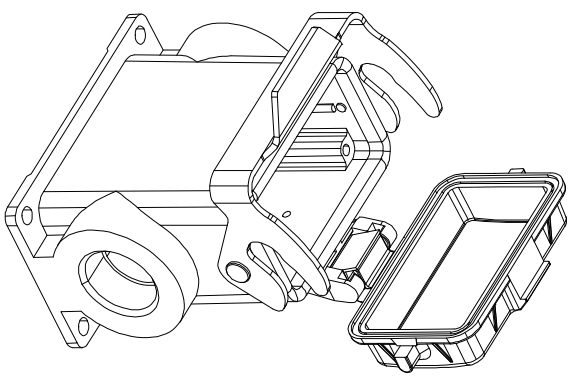

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.9	UNITS	MM
CHK.	DATE			SCALE	1:1
APP.	DATE				A4
NINGBO UL0 ELECTRONICS CO.,LTD.				NAME	UL0-HC06-H10B-SFH-1L-MCV-XX
宁波欧路电子有限公司				DWGNO.	