



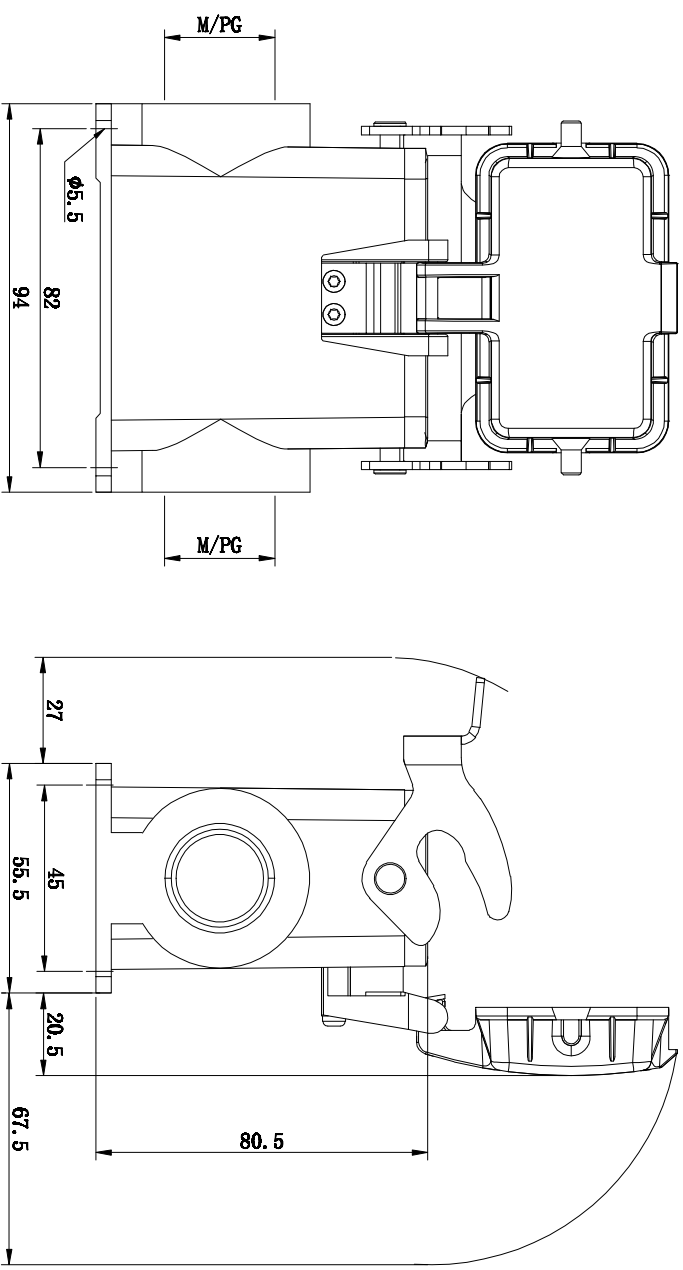

REV	E.C.N NO.	CONTENT	CHK	DATE
Type			Thread size (M/PG)	
ULO-HC06-H10B-SFH-1L-CV-M25			M25	
ULO-HC06-H10B-SFH-1L-CV-2M25			2M25	
ULO-HC06-H10B-SFH-1L-CV-M32			M32	
ULO-HC06-H10B-SFH-1L-CV-2M32			2M32	
ULO-HC06-H10B-SFH-1L-CV-PG21			PG21	
ULO-HC06-H10B-SFH-1L-CV-2PG21			2PG21	
ULO-HC06-H10B-SFH-1L-CV-PG29			PG29	
ULO-HC06-H10B-SFH-1L-CV-2PG29			2PG29	

technical specification:

- 1. Material: Aluminium die-cast
- 2. Materia, coverl: PC
- 3. Surface: powder-coated
- 4. Colour: (grey)
- 5. Temperature range: -40℃ - +125℃
- 6. Degree of Protection: IP65
(acc. to IEC 60529 for coupled connector)
- 7. Locking element:
locking type:single locking latch
material: metal galvanized/nickel plating
- 8. Cable entry: side entry
- 9. Thread size: M/PG
- 10 Hoods/Housings sealing: NBR

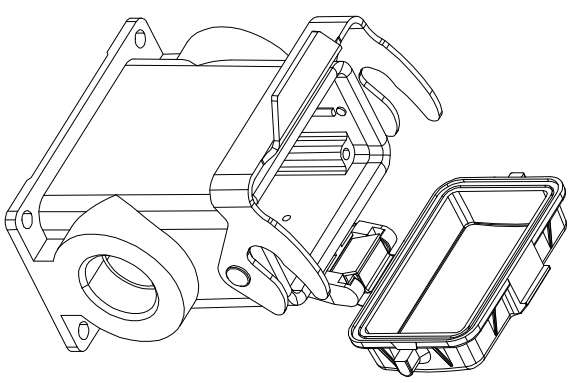

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.9	UNITS	MM
CHK.	DATE			SCALE	1:1
APP.	DATE				A4
NINGBO ULO ELECTRONICS CO.,LTD.				NAME	ULO-HC06-H10B-SFH-1L-CV-XX
宁波欧路电子有限公司				DWGNO.	