



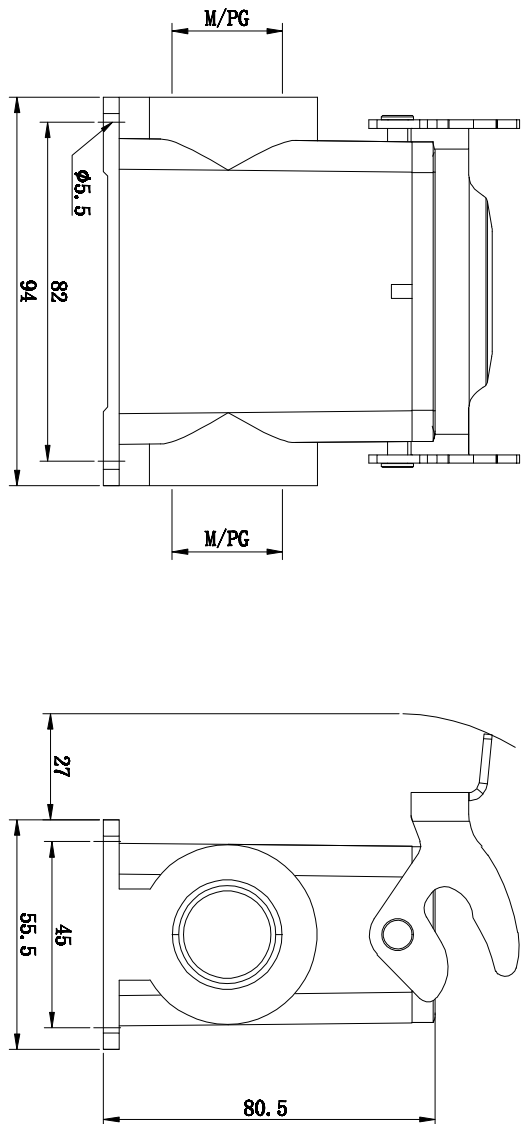

REV	E.C.N NO.	CONTENT	CHK	DATE
Type			Thread size (M/Pg)	
UL0-HC06-H10B-SFH-1L-M25			M25	
UL0-HC06-H10B-SFH-1L-2M25			2M25	
UL0-HC06-H10B-SFH-1L-M32			M32	
UL0-HC06-H10B-SFH-1L-2M32			2M32	
UL0-HC06-H10B-SFH-1L-PG21			PG21	
UL0-HC06-H10B-SFH-1L-2PG21			2PG21	
UL0-HC06-H10B-SFH-1L-PG29			PG29	
UL0-HC06-H10B-SFH-1L-2PG29			2PG29	

Technical specification:

- Material: Aluminium die-cast
-
- Surface:powder-coated
- Colour: (grey)
- Temperature range:-40℃ - +125℃
- Degree of Protection: IP65
(acc. to IEC 60529 for coupled connector)
- Locking element:
locking type:single locking latch
material: metal galvanized/nickel plating
- Cable entry: side entry
- Thread size: M/Pg
- Hoods/Housings sealing: NBR

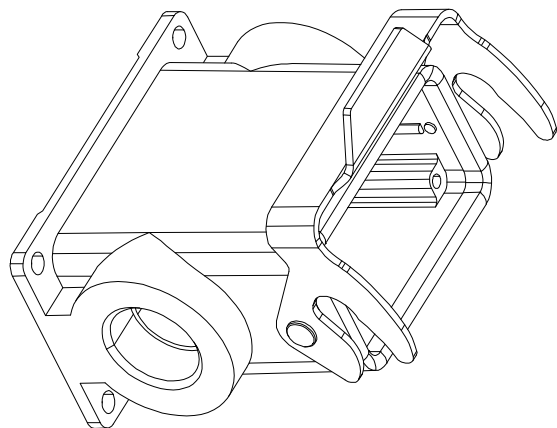

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.9	UNITS	MM
CHK.	DATE			SCALE	1:1
APP.	DATE				A4
NAME				UL0-HC06-H10B-SFH-1L-XX	
DWGNO.					