



REV	E.C.N NO.	CONTENT	CHK	DATE
Type			Thread size (M/Pg)	
ULO-HC06-H10B-SF-2L-M20			M20	
ULO-HC06-H10B-SF-2L-2M20			2M20	
ULO-HC06-H10B-SF-2L-M25			M25	
ULO-HC06-H10B-SF-2L-2M25			2M25	
ULO-HC06-H10B-SF-2L-PG16			PG16	
ULO-HC06-H10B-SF-2L-2PG16			2PG16	

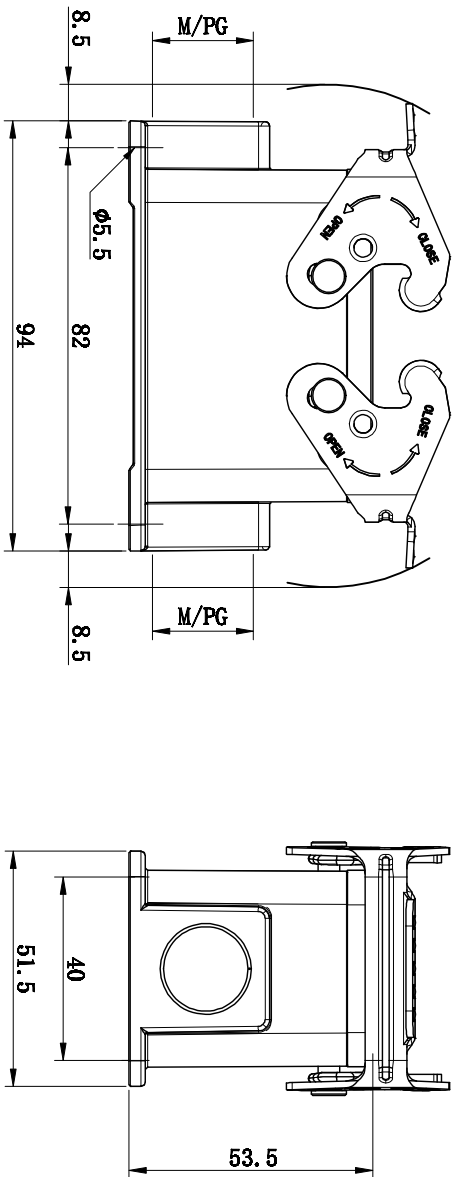

Technical specification:

1. Material: Aluminium die-cast
2. Surface: powder-coated
3. Colour: (grey)
4. Temperature range: -40℃ - +125℃
5. Degree of Protection: IP65 (acc. to IEC 60529 for coupled connector)
6. Locking element: locking type: double locking latch material: metal galvanized/nickel plating
7. Cable entry: side entry
8. Thread size: M/Pg
9. Hoods/Housings sealing: NBR

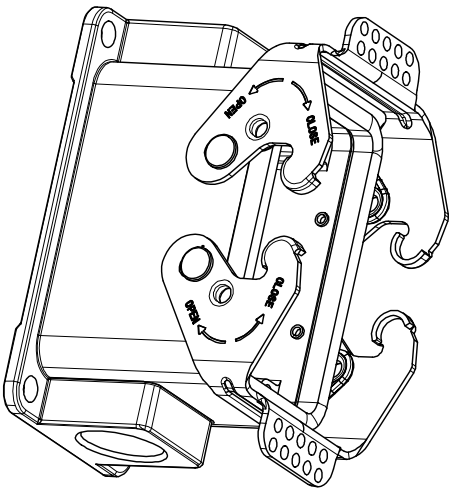

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.9	UNITS	MM
CHK.	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	ULO-HC06-H10B-SF-2L-XX		
NINGBO ULO ELECTRONICS CO.,LTD.			DWGNO.		
宁波欧路电子有限公司					