



Type	Thread size (M/Pg)
ULO-HC06-H10B-SF-4B-CV-M25	M25
ULO-HC06-H10B-SF-4B-CV-2M25	2M25
ULO-HC06-H10B-SF-4B-CV-M32	M32
ULO-HC06-H10B-SF-4B-CV-2M32	2M32
ULO-HC06-H10B-SF-4B-CV-PG21	PG21
ULO-HC06-H10B-SF-4B-CV-2PG21	2PG21
ULO-HC06-H10B-SF-4B-CV-PG29	PG29
ULO-HC06-H10B-SF-4B-CV-2PG29	2PG29

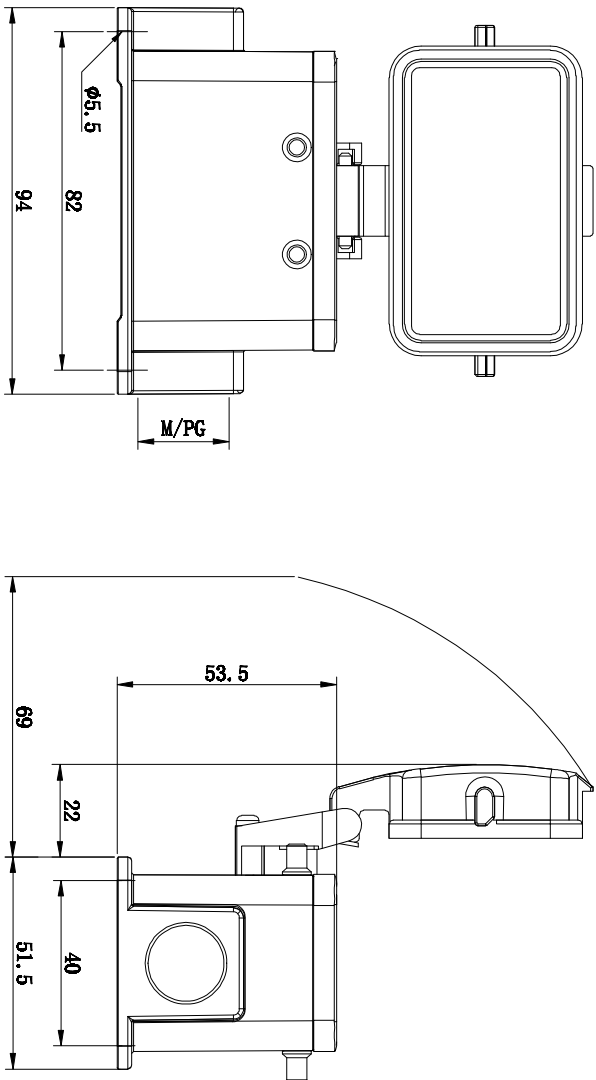

Technical specification:

1. Material: Aluminium die-cast
2. Materia, coverl: PC
3. Surface: powder-coated
4. Colour: (grey)
5. Temperature range: -40°C - +125°C
6. Degree of Protection: IP65
(acc. to IEC 60529 for coupled connector)
7. Cable entry: side entry
8. Thread size: M/Pg
9. Hoods/Housings sealing: NBR

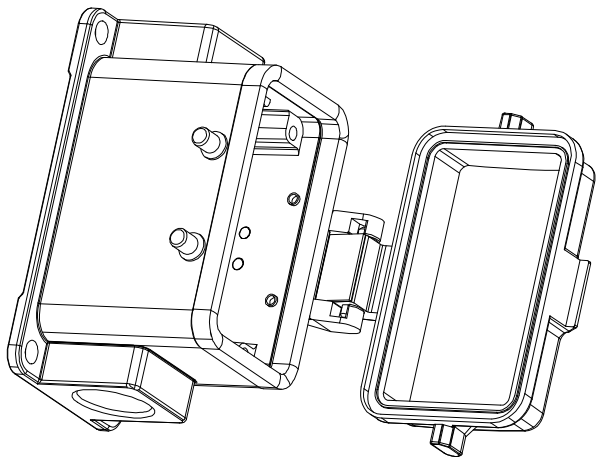

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.21	UNITS	MM
CHK.	DATE	DATE		SCALE	1:1
APP.	DATE	DATE			A4
NAME				ULO-HC06-H10B-SF-4B-CV-XX	
DWGNO.					



NINGBO ULO ELECTRONICS CO.,LTD.
宁波欧路电子有限公司