
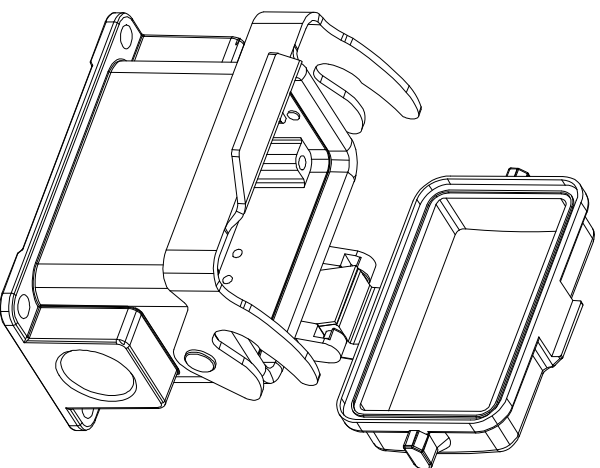
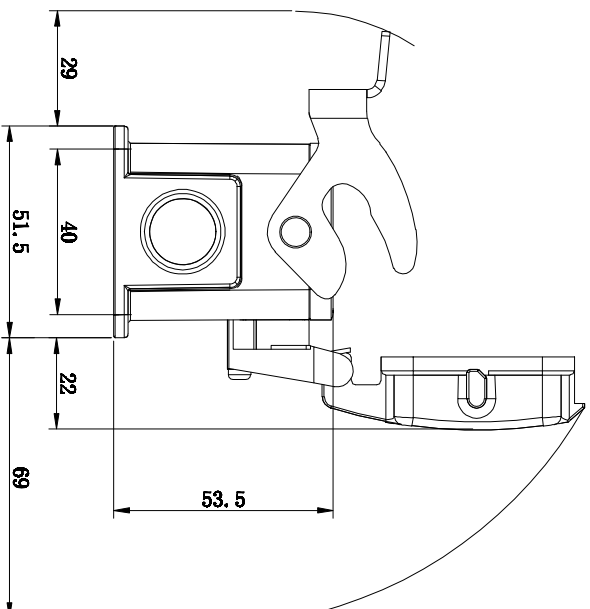


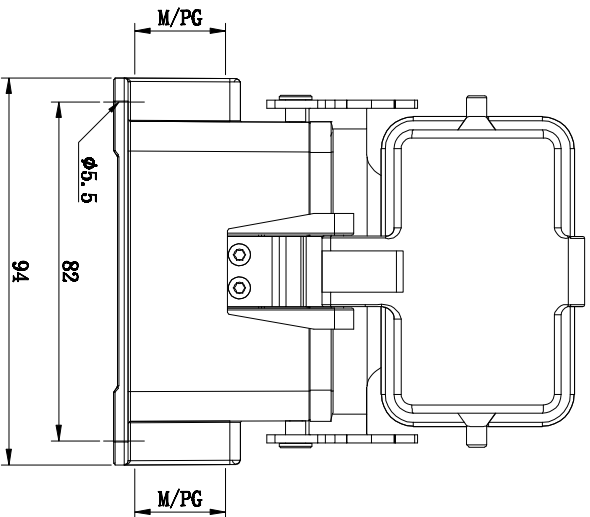

REV	E.C.N NO.	CONTENT	CHK	DATE
Type			Thread size (M/PG)	
ULO-HC06-H10B-SF-1L-MCV-M20			M20	
ULO-HC06-H10B-SF-1L-MCV-2M20			2M20	
ULO-HC06-H10B-SF-1L-MCV-M25			M25	
ULO-HC06-H10B-SF-1L-MCV-2M25			2M25	
ULO-HC06-H10B-SF-1L-MCV-PG16			PG16	
ULO-HC06-H10B-SF-1L-MCV-2PG16			2PG16	

Technical specification:

1. Material: Aluminium die-cast
2. Materia, coverl: Aluminium die-cast
3. Surface: powder-coated
4. Colour: (grey)
5. Temperature range: -40℃ - +125℃
6. Degree of Protection: IP65
(acc. to IEC 60529 for coupled connector)
7. Locking element:
locking type:single locking latch
- material: metal
- galvanized/nickel plating
8. Cable entry: side entry
9. Thread size: M/PG
- 10 Hoods/Housings sealing: NBR

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.9	UNITS	MM
CHK.	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	ULO-HC06-H10B-SF-1L-MCV-XX		
NINGBO ULO ELECTRONICS CO.,LTD.			DWGNO.		



NINGBO ULO ELECTRONICS CO.,LTD.
宁波欧路电子有限公司

DWGNO.