



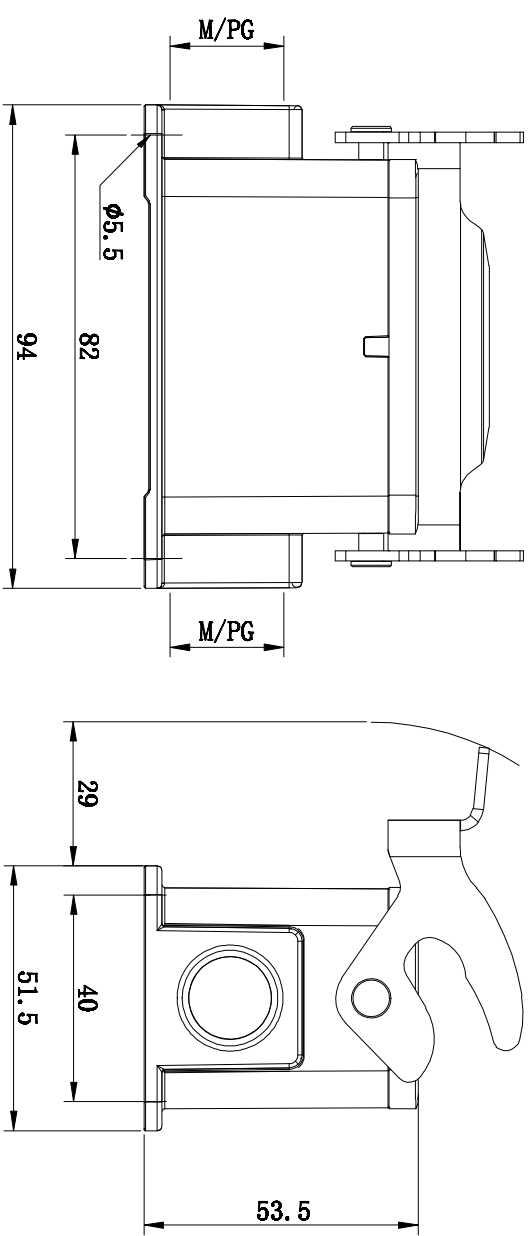

Type	Thread size (M/PG)
UL0-HC06-H10B-SF-1L-M20	M20
UL0-HC06-H10B-SF-1L-2M20	2M20
UL0-HC06-H10B-SF-1L-M25	M25
UL0-HC06-H10B-SF-1L-2M25	2M25
UL0-HC06-H10B-SF-1L-PG16	PG16
UL0-HC06-H10B-SF-1L-2PG16	2PG16

Technical specification:

1. Material: Aluminium die-cast
2. Surface: powder-coated
3. Colour: (grey)
4. Temperature range: -40℃ - +125℃
5. Degree of Protection: IP65 (acc. to IEC 60529 for coupled connector)
6. Locking element:
locking type:single locking latch
material: metal galvanized/nickel plating
7. Cable entry: side entry
8. Thread size: M/PG
9. Hoods/Housings sealing: NBR

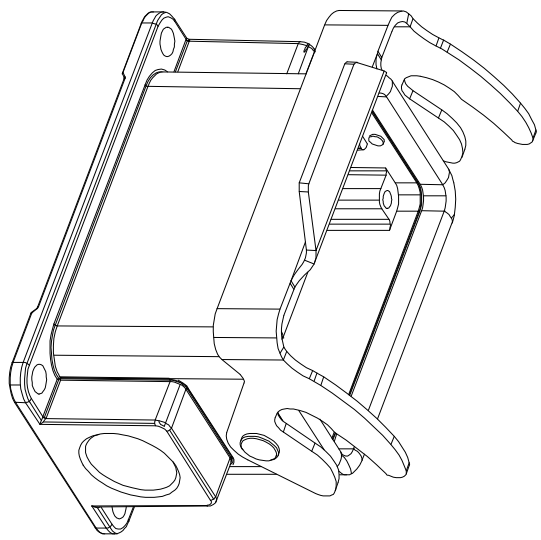

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	2023.12.9	UNITS	MM
CHK.	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	UL0-HC06-H10B-SF-1L-XX		
NINGBO UL0 ELECTRONICS CO.,LTD.					
宁波欧路电子有限公司					
DWGNO.					