

NOTES1:

UL Standard

1. Rating voltage/current: 300V/15A

2 Wire range: 14~26AWG

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	I
Rate Impulse Voltage(kV)	4.0kV
Rate Voltage(V)	250V
Rate Current(A)	10A

2 wire range: 0.75-15mm²

NOTES2:

1.Housing: PA66(UL94V-0)

2.Conductor: Brass(Sn Plated)

3.Spring: Stainless Steel

4.Screw: Steel(M2.5,Zn Plated)



NOTES3:

1.Pitch: 5.0mm Poles: 02-24P

2.Stripping length: 7mm

3.Operating temperature: -40℃~+105℃

4.RoHS Compliance

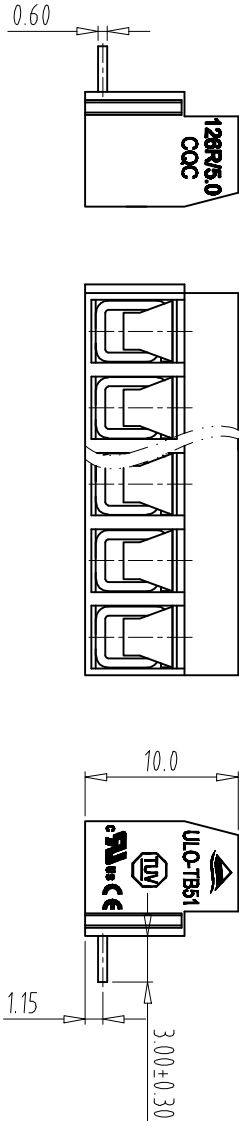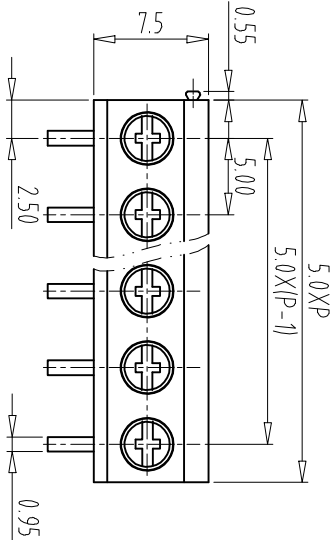

How to order
UL0-TB51 - 126R/5.0 - XXP - Y 0 0 0A

Certificate Factory poles
Series NO. Code

Customer requirements

color:

- 1:Grey 6:Red
- 2:Blue 7:transparent
- 3:Black 8:Yellow
- 4:Green 9:white
- 5:Orange

Total Pitch Tolerances										Nominal dimension range										—	//
in mm										in mm											

over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	over	
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100	150	
± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.55	± 0.70	± 0.75	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	
6									5									4		0.5	

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.04.24	UNITS	MM
CHK.	DATE	SCALE	1 : 1	SHEET/OF	1/1
APP.	DATE	NAME	UL0-TB51-126R/5.0-XXP-Y000A		
NINGBO UL0 ELECTRONICS CO.,LTD.			DWGNO.	UL0TB51Y000A	