


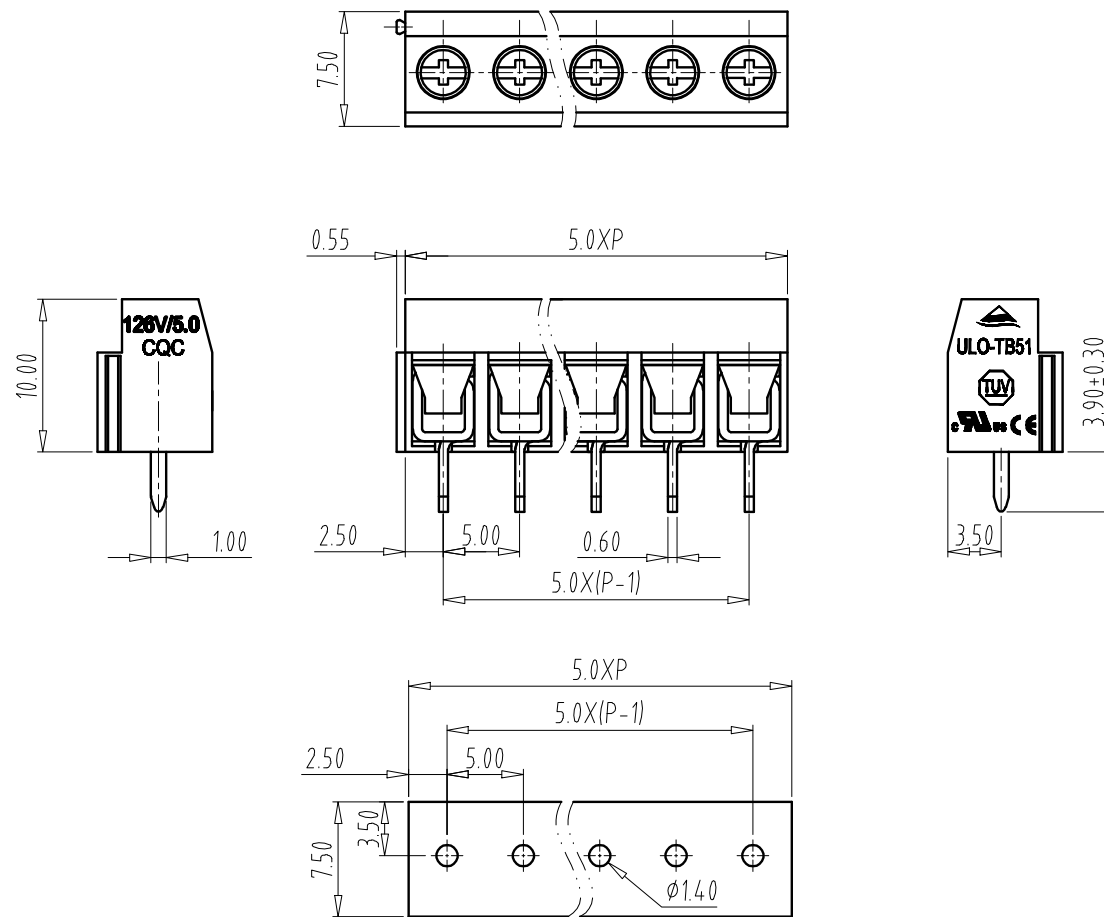

NOTES1:

UL Standard

1. Rating voltage/current: 300V/10A
2. Torque value: M2.5, 3.1Lb.in
3. Wire range: 26~14AWG

IEC Standard

- 1.

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	2.0KV
Rate Voltage(V)	250V
Rate Current(A)	18A

3. wire range: 0.5-2.5mm²

NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Conductor: Brass(Sn Plated)
- 3.Spring: Stainless Steel
- 4.Screw: Steel(M2.5,Zn Plated)

NOTES3:

- 1.Pitch: 5.0mm Poles: 02-24P
2.Stripping length: 7mm
3.Operating temperature: -40℃~+105℃
4.RoHS Compliance

How to order

<u>ULO-TB51</u>	-	<u>126/5.0</u>	-	<u>XXP</u>	-	<u>Y 0 0 0A</u>
Certificate Series NO.		Factory Code		poles		Customer requirements

— color:

- 1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

ITEM	NAME OF PART		NO. OF PART	Q'TY	MATERIAL		NOTE	
DWG.	LZW	DATE	22.04.18	UNITS	MM	SHEET/OF		1/1
CHK.		DATE		SCALE	1:1	A4		
APP.		DATE		NAME	UL0-TB51-126/5.0-XXP-Y000A			
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司					DWGNO	UL0TB51Y000A		