


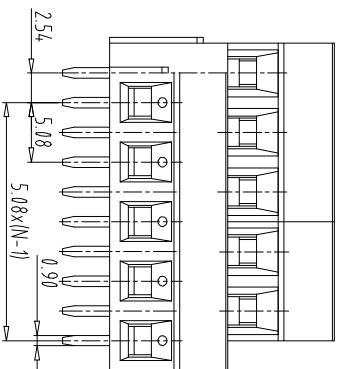
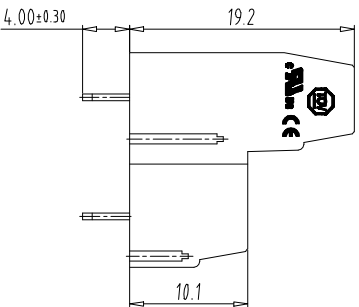


FILE: 2020-D01VUL0

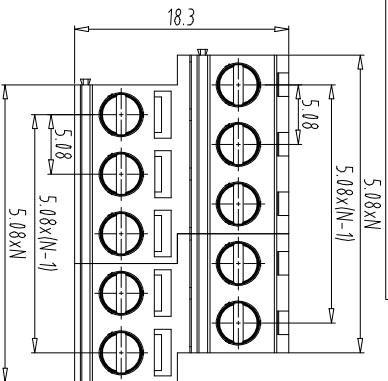

REV	EC.N NO.	CONTENT	CHK	DATE
-----	----------	---------	-----	------

NOTES:

UL Standard

1.

Use group	B	C	D
Rated Current	12A	-	10A
Rated Voltage	300V	-	300V

2 Wire range: 14~26AWG

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	4KV
Rate Voltage(V)	250V
Rate Current(A)	15A

2 Wire range: 0.5-15mm²

3 Torque value: M3, 0.5Nm

NOTES2:

- Housing(2P): PA66(UL94V-0)
- Housing(3P): PA66(UL94V-0)
- Solder Pin: Brass(Tin Plated)
- Block: Brass(Ni Plated)
- Screw: Steel(M3.0,Zn Plated)

NOTES3:

- Pitch: 5.08mm Poles: 02-24P
- Stripping length: 6mm
- Operating temperature: -40℃~+105℃
- RoHS Compliance

How to order

ULO-TB53 - 127A/5.08 - XXP - Y 0 0 0A

Certificate Factory poles
Series NO. Code

Customer requirements

color:

- Grey
- Blue
- Black
- Green
- Orange
- Red
- transparent
- Yellow
- White

PCB Layout

Total Pitch Tolerances		Nominal dimension range							
in mm		in mm							
over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0
to	to	to	to	to	to	to	to	to	to
53	70	90	115	150	200	250	320	30	53
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20
±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.80	±0.90	0.2
0.2	0.3	0.3	0.3	0.2	0.3	0.3	0.2	0.3	0.5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.05.08	UNITS	MM
CHK.	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	ULO-TB53-127A/5.08-XXP-Y000A	DWGNO.	UL0TB53Y000A



NINGBO UL0 ELECTRONICS CO.,LTD.
宁波欧路电子有限公司