

FILE: 2021-D01VUL0



REV

EC.N NO.

CONTENT

CHK

DATE

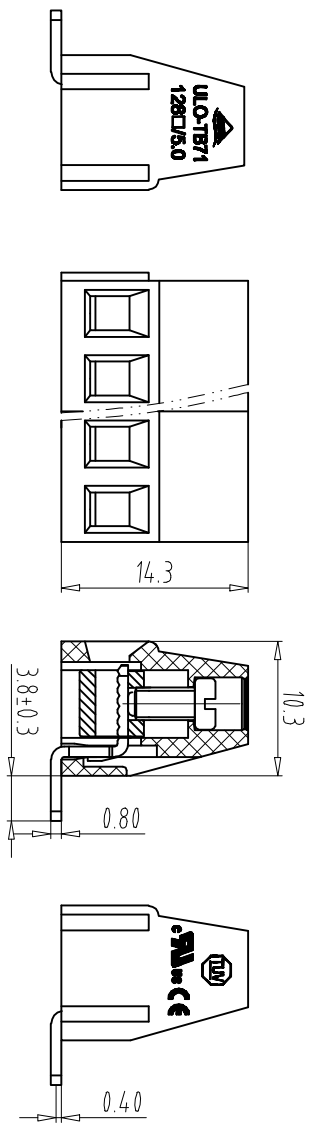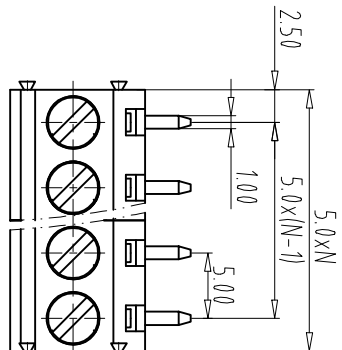

NOTES1:

UL Standard

Use group	B	C	D
Rated Current	20A	—	10A
Rated Voltage	300V	—	300V

2. Wire range: 12~30AWG

IEC Standard

Pollution Degree	2
Overvoltage Category	II
Rate impulse Voltage(KV)	4KV
Rate Voltage(V)	250V
Rate Current(A)	18A

2. wire range: 10~2.5mm²

NOTES2:

1.Housing: PA66(V0)(Green)

2.Black: Brass(Ni Plated)

3.Solderpin: Brass(Tin Plated)

4.Screw: Steel(M2.5,Zn Plated)

NOTES3:

1.Pitch: 5.0mm Poles: 02-24P

2.Stripping length: 6mm

3.Operating temperature: -40℃~+105℃

4.RoHS Compliance

How to order

ULO-TB71 - 128R/5.0 - XXP - Y 0 0 0 A


Certificate Factory poles
Series NO. Code
Customer requirements

- color:
- 1:Grey
 - 2:Blue
 - 3:Black
 - 4:Green
 - 5:Orange
 - 6:Red
 - 7:transparent
 - 8:Yellow
 - 9:White

PCB Layout

Total Pitch Tolerances		Nominal dimension range		T		=		—		//	
in mm		in mm									
over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53
to	to	to	to	to	to	to	to	to	to	to	to
53	70	90	115	150	200	250	320	30	53	70	90
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30
±0.35	±0.44	±0.55	±0.70	±0.75	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3
0.5											

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.04.24	UNITS	MM
CHK.	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	ULO-TB71-128R/5.0-XXP-Y000A		
		DWGNO.	UL0TB7Y000A		



NINGBO UL0 ELECTRONICS CO., LTD.

宁波欧路电子有限公司