

		2		1	
REV	E.C.N NO.	CONTENT	CHK	DATE	

NOTES:

UL Standard

1.

Use group	B	C	D
Rated Current	20A	—	10A
Rated Voltage	300V	—	300V

2. Wire range: 30~12AWG

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	4KV
Rate Voltage(V)	250V
Rate Current(A)	18A

2.Wire range: 1.0-2.5mm²

3. Torque value: M2.5, 0.4Nm

NOTES:

- 1.Housing(2P): PA66(UL 94 V-0)
- 2.Housing(3P): PA66(UL 94 V-0)
- 3.Solder Pin: Brass(Tin Plated)
- 4.Block: Brass(Ni Plated)
- 5.Screw: Steel(M2.5,Zn Plated)

NOTES:

- 1.Pitch: 5.0mm Poles: 02-24P
2.Operating temperature: -40℃~+105℃
3.RoHS Compliance

How to order







UL0-TB71 - 128/5.0 - XXP - Y 0 0 0A

Certificate Series NO.	Factory Code	poles

Customer requirements

—color:

- 1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

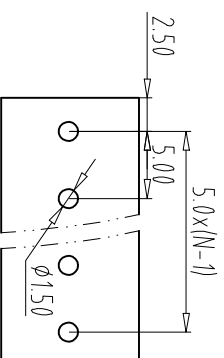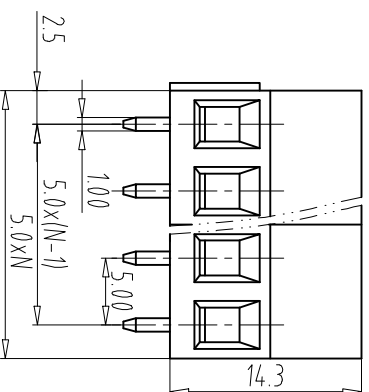

Total Pitch Tolerances in mm	Nominal dimension range in mm	Tolerance zone symbols
		—
		=
		L

[illegible]

ITEM	NAME OF PART	NO. OF PART	Q-TY	MATERIAL	NOTE
DWG.	LZW	DATE 21.05.08	UNITS	MM	SHEET/OF 1/1
CHK.		DATE	SCALE	1:1	A4
APP.		DATE	NAME	UL0-1B71-120/5.0-XXP-Y000A	
NINGBO UL0 ELECTRONICS CO.,LTD			UL0TB71Y000A		
宁波欧路电子有限公司					