

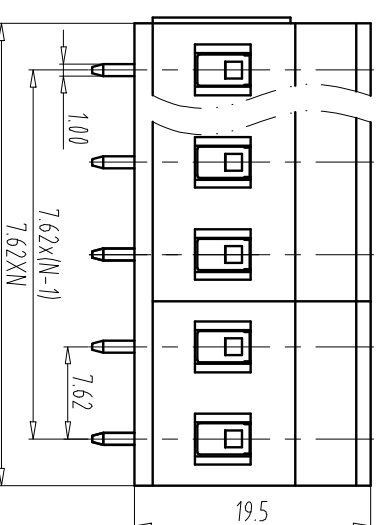
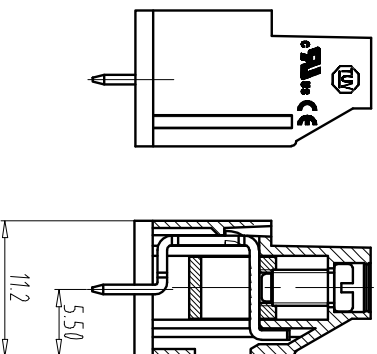


		2		1	
REV	E.C.N NO.	CONTENT	CHK	DATE	

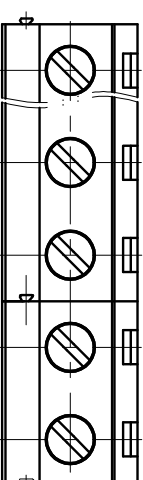

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(kV)	6.0kV
Rate Voltage(V)	450V
Rate Current(A)	20A

- | Use group | B | C | D |
|---------------|------|---|------|
| Rated Current | 20A | — | 10A |
| Rated Voltage | 300V | — | 300V |
 - Wire range: 26~12AWG
 - Torque value: M3, 4, 4.3lb.in
- IEC Standard

2. Wire range: 0.5~2.5mm²
3. Torque value: M3, 0.5Nm
- NOTES:

- NOTES:
- 1.Pitch: 7.62mm Poles: 02-24P
- 2.Stripping length: 8mm
- 3.Operating temperature: -40°C~+105°C
- 4.RoHS Compliance

How to order

UL0-TB43 - 129C/7.62 - XXP - Y 000A

Certificate Series NO.	Factory poles Code	Customer requirements
---------------------------	-----------------------	--------------------------

1:Grey	6:Red
2:Blue	7:transparent
3:Black	8:Yellow
4:Green	9:White
5:Orange	

Total Pitch Tolerances	Nominal dimension range		=	-	//
A					

[illegible]

ITEM	NAME OF PART	NO OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE 2022.03.15	UNITS	MM	SHEET/OF 1/1
CHK.		DATE	SCALE	1:1	A4
APP.		DATE			
NINGBO ULIO ELECTRONICS CO.,LTD.			NAME		
宁波欧路电子有限公司			ULIO-TB4-3-129C/7.62-XXP-Y000A		
			DWGNO. ULIO TB4-34000A		