

REV	E.C.N. NO.	CONTENT	CHK	DATE

NOTES:

UL Standard

1

Use group	B	C	D
Rated Current	20A	—	10A
Rated Voltage	300V	—	300V

3. Wire range: 26 ~ 12AWG

4. Torque value: M3, 4.43Lb.in

IEC Standard

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(kV)	6kV
Rate Voltage(V)	450V
Rate Current(A)	20A

2. Wire range: 0.5 ~ 2.5mm²

3. Torque value: M3, 0.5Nm

NOTES:

- 1.Housing: PA66(UL94V-0)
- 3.Pin Header: Brass(Sn Plated)
- 4.Cage: Brass(Ni Plated)
- 5.Screw: Steel(M3,Zn Plated)

NOTES:

- 1.Pitch: 7.5mm Poles: 02-24P
- 2.Stripping length: 8mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order



UL0-TB37 - 129/7.5 - XXP - Y 0 0 0A

Certificate Series NO.	Factory Code	poles

Customer requirements

— color:

- 1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

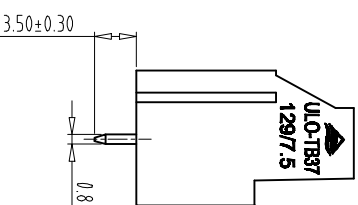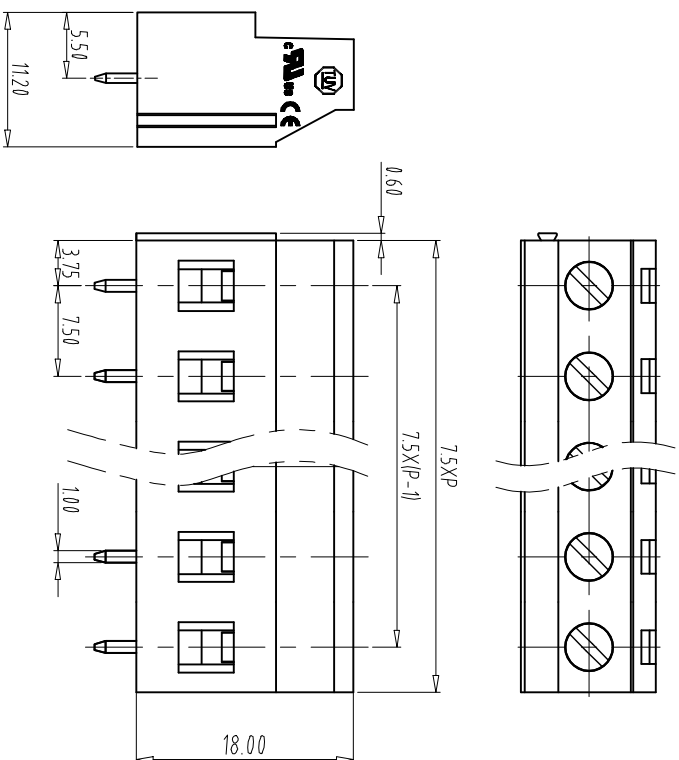

Total Pitch Tolerances in mm	Nominal, dimension range in mm	— //
---------------------------------	-----------------------------------	---------

[illegible]

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL		NOTE
DWG	ZJL	DATE 21.01.26	UNITS	MM	SHEET/OF	1/1
G/K		DATE	SCALE	1 : 1	A4	
APP.		DATE	NAME			
ULD-1B37-129/7.5-XXP-Y000A						
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司						
DWGNO			UL01B37Y000A			