
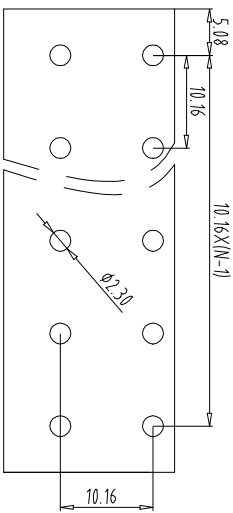
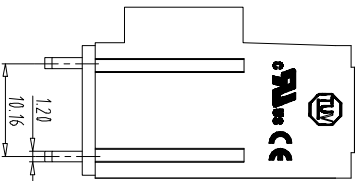
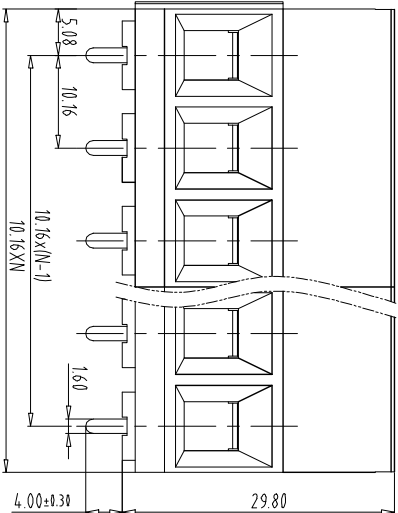


FILE: 2020-D01VUL0					
REV	E.C.N NO.	CONTENT	CHK	DATE	

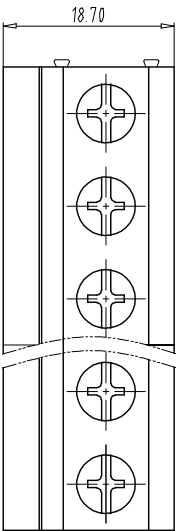

PCB LAYOUT

Total Pitch Tolerances		Nominal dimension range					
in mm		in mm					
over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200
to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70
6				5			

1. Use group	B	C	D
Rated Current	52A	52A	5A
Rated Voltage	300V	300V	600V

2. Wire range: 6~20AWG
IEC Standard

1. Pollution Degree	2
Overvoltage Category	II
Rated Impulse Voltage(kV)	8.0kV
Rated Voltage(V)	750V
Rated Current(A)	57A

2. wire range: 4.0~10mm²
NOTES2:

- Housing: PA66(UL94V-0)
- Cover: PA66(UL94V-0)
- Solder Pin: Brass(Sn Plated)
- Screw: Steel(M4.0 Zn Plated)
- Cage: Brass(Ni Plated)

NOTES3:

- Pitch: 10.16mm Poles: 02-24P
- Stripping length: 11mm
- Operating temperature: -40℃~+105℃
- RoHS Compliance

How to order

UL0-TB46 - 135T/10.16 - XXP - Y 0 0 0 A

Certificate Factory poles
Series NO. Code requirements

- color:
- 1:Grey 6:Red
 - 2:Blue 7:transparent
 - 3:Black 8:Yellow
 - 4:Green 9:White
 - 5:Orange

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.05.10	UNITS	MM
CHK	DATE		SCALE	1 : 1	A4
APP.	DATE		NAME	UL0-TB46-135T/10.16-XXP-Y000A	
			DWGNO.	UL0TB46Y0000A	



NINGBO UL0 ELECTRONICS CO.,LTD.
宁波欧路电子有限公司