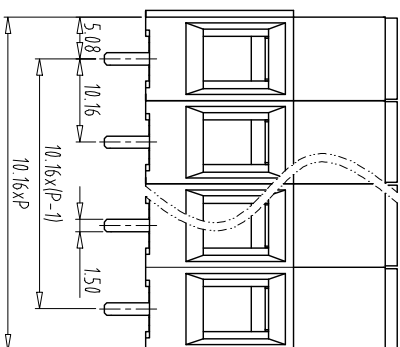
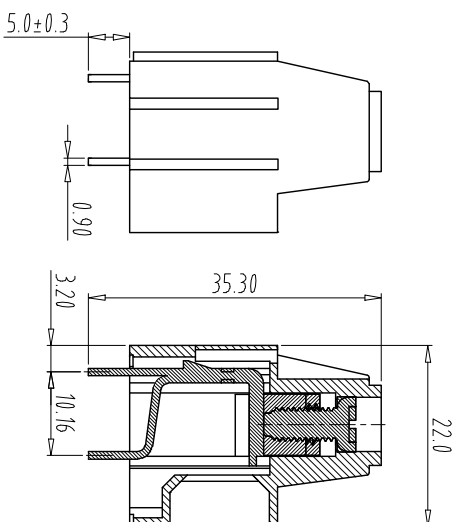



Pollution Degree	2
Overvoltage Category	I
Rate Impulse Voltage(KV)	8.0k
Rate Voltage(V)	1000
Rate Current(A)	65.

Use group	B	C	D
Rated Current	60A	60A	10A
Rated Voltage	300V	300V	300V

NOTES:

UL Standard

1.

Use group	B	C	D
Rated Current	60A	60A	10
Rated Voltage	300V	300V	30

2. Wire range: 6~20AWG

IEC Standard


2. wire range: 2.5-16mm²
3. Torque value: M4, 1.2Nm

NOTES:

1.Pitch: 10.16mm Poles:02-24P
2.Stripping length: 10mm
3.Operating temperature: -40℃~+105℃
4.RoHS Compliance

How to order

UL0-TB37	-	136HT/10.16	-	XXP	-	Y	0 0.0A
Certificate		Factory		poles		Customer	
Series NO.		Code				requi	

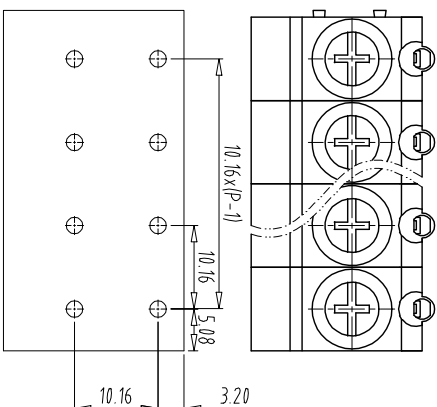

		Total Pitch Tolerances in mm				Nominal dimension range in mm				T		=		—		//	
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10
± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.55	± 0.70	± 0.75	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90
0.2	0.3	0.3	0.2	0.3	0.5	0.5	0.7	0.7	0.2	0.3	0.3	0.2	0.3	0.5	0.5	0.7	0.7

ITEM	NAME OF PART		NO. OF PART	Q'TY	MATERIAL		NOTE
DWG.	LZw	DATE	2021.03.16	UNITS	MM	SHEET/OF	1/1
CHK.		DATE		SCALE	1:1	A4	
APP.		DATE					
	NINGBO ULIO ELECTRONICS CO.,LTD.			NAME	UL0-1B37-136HT/10.16-XP-Y000A		
				DWGNO.	UL0TB37Y000A		