
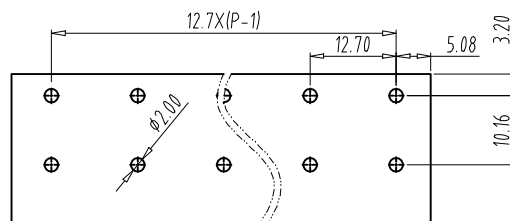
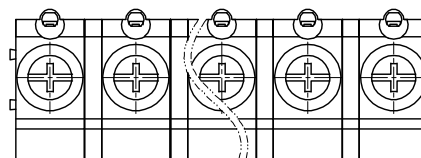

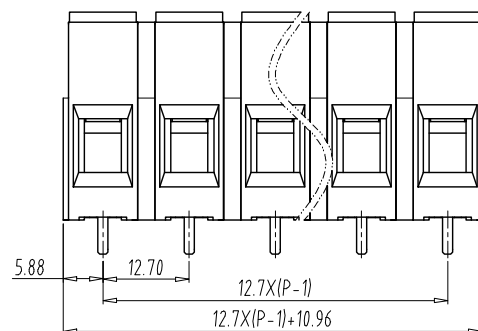
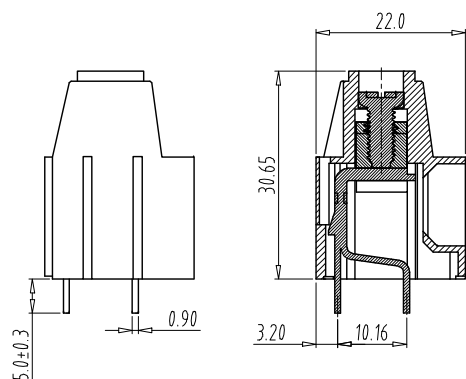


FILE: 2020-D01VUL0

REV	E.C.N NO.	CONTENT	CHK	DATE

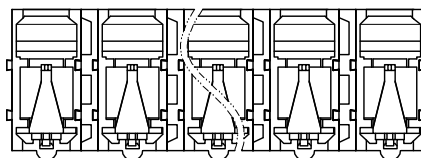

PCB layout

NOTES1:

UL Standard

1.

Use group	B	C	D
Rated Current	60A	60A	10A
Rated Voltage	600V	600V	600V

2 Torque Value: M4, 10.53Lb.in

3 Wire Range: 20~6AWG

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	8.0KV
Rate Voltage(V)	1000V
Rate Current(A)	65A

2 Torque Value: M4, 1.2N.M

3 Wire Range: 2.5~16.0mm²

NOTES2:

1.Housing: PA66(UL94V-0)

2.Solder Pin: Brass(Sn Plated)

3.Block: Brass(Ni Plated)

4.Screw: Steel(M4.0,Zn Plated)

5.Cover: PA66(UL94V-0)

NOTES3:

1.Pitch: 12.7mm Poles: 02~24P

2.Stripping length: 10mm

3.Operating temperature: -40℃~+105℃

4.RoHS Compliance

How to order

UL0-TB37 - 136HT/12.7 - XXP - Y 0 0 0A

Certificate
Series NO.Factory
Code

poles

Customer
requirements

color:

- | | |
|----------|---------------|
| 1:Grey | 6:Red |
| 2:Blue | 7:transparent |
| 3:Black | 8:Yellow |
| 4:Green | 9:White |
| 5:Orange | |

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.07.27	UNITS	MM
CHK.		DATE		SCALE	1:1
APP.		DATE			
				NAME	UL0-TB37-136HT/12.7-XXP-Y000A
				DWGNO.	UL0TB37Y000A



NINGBO ULO ELECTRONICS CO.,LTD.

宁波欧路电子有限公司