

REV	EC.N NO.	CONTENT	CHK	DATE

NOTES:

UL Standard

→

Use group	B	C	D
Rated Current	10A	10A	10A
Rated Voltage	300V	300V	300V

2. Wire range: 22~16AWG

IEC Standard

1

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	450V
Rate Current(A)	15A

2.wire range: 0.2-1.5mm²

NOTES:

- 1.Housing: PA66(UL94V-0)
- 2.End Cover: PA66(UL94V-0)
- 3.Solder Pin: Brass(Sn Plated)
- 4.Lever: PA66(UL94V-0)
- 5.Spring Coil : Stainless

NOTES:


- 1.Pitch: 7.5mm Poles: 02-24P
2.Operating temperature: -40℃~+105℃
3.RoHS Compliance

How to order

ULO-TB18 - 142R/7.5 - XXP - Y 0 0 0 A

Certificate Series NO.	Factory Code	poles

Customer requirements

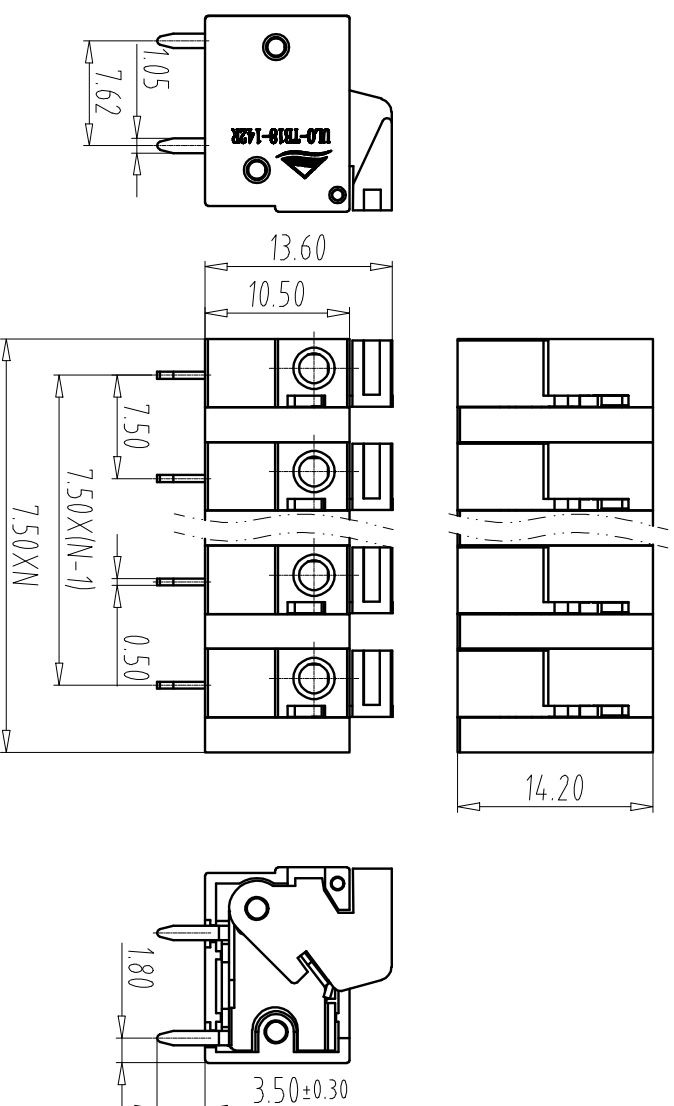

Total Pitch Tolerances	Nominal dimension range	=	-	//
A				

[illegible]

ITEM	NAME OF PART	NO. OF PART	Q-TY	MATERIAL	NOTE
DWG.	LZW	DATE 21.06.08	UNITS	MM	SHEET/OF 1/1
CHK		DATE	SCALE	1 : 1	A4
APP.		DATE			
NINGBO UL0 ELECTRONICS CO.,LTD.			UL0-1B18-142R/7.5-XXP-Y000A		
宁波欧路电子有限公司			UL01B18Y000A		
			DWGNO		