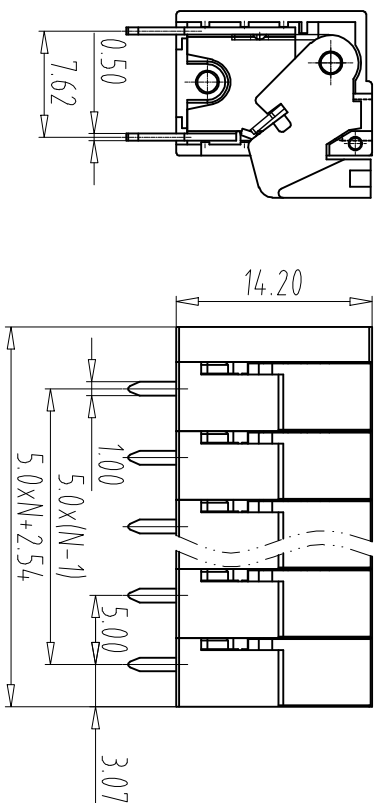
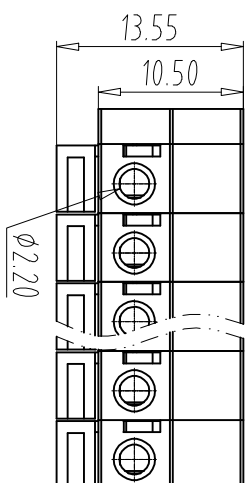


Use group	B	C	D
Rated Current	10A	10A	10A
Rated Voltage	300V	300V	300V

2. Wire range: 16~22AWG

IEC Standard

Pollution Degree	3	2	2
Overvoltage Category	III	II	I
Rate Impulse Voltage(KV)	4kV	4kV	4kV
Rate Voltage(V)	250V	320V	630V
Rate Current(A)	15A	15A	15A

2.wire range: 0.2-1.5mm²

NOTES:

- 1.Housing: PA66(UL94V-0)
- 2.End Cover: PA66(UL94V-0)
- 3.Solder Pin: Brass(5n Plated)
- 4.Lever: PA66(UL94V-0)
- 5.Spring Coil : Stainless

NOTES:


- 1.Pitch: 5.0mm Poles: 02-24P
2.Stripping length: 10mm
3.Operating temperature: -40℃~+105℃
4.RoHS Compliance

How to order

UL0-TB18	-	142V/5.0	-	XXP	-	Y	0 0 0A
----------	---	----------	---	-----	---	---	--------

Certificate Series NO.	Factory Code	poles

Customer requirements

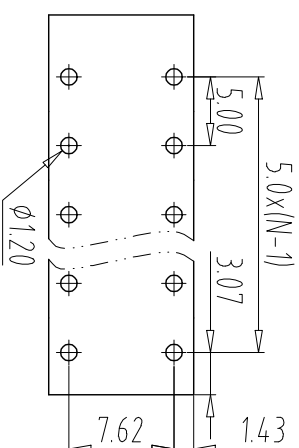[illegible]

		2		1	
REV	EC.N NO.	CONTENT	CHK	DATE	

NOTES:

UL Standard

- | | |
|----|-----------|
| 1. | Use group |
|----|-----------|

Use group	B	C	D
Rated Current	10A	10A	10A
Rated Voltage	300V	300V	300V

2. Wire range: 16~22AWG

IEC Standard

Pollution Degree	3	2	2
Overvoltage Category	III	II	I
Rate Impulse Voltage(KV)	4kV	4kV	4kV
Rate Voltage(V)	250V	320V	630V
Rate Current(A)	15A	15A	15A

2.wire range: 0.2-1.5mm²

NOTES:

- 1.Housing: PA66(UL94V-0)
- 2.End Cover: PA66(UL94V-0)
- 3.Solder Pin: Brass(5n Plated)
- 4.Lever: PA66(UL94V-0)
- 5.Spring Coil : Stainless

NOTES:

- 1.Pitch: 5.0mm Poles: 02-24P
2.Stripping length: 10mm
3.Operating temperature: -40℃~+105℃
4.RoHS Compliance

How to order

UL0-TB18	-	142V/5.0	-	XXP	-	Y	0 0 0A
----------	---	----------	---	-----	---	---	--------

Certificate Series NO.	Factory Code	poles

Customer requirements

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE 21.06.07	UNITS	MM	SHEET/OF 1/1
CHK.		DATE	SCALE	1 : 1	A4
APP.		DATE	NAME	UL0-1B18-142V/5-0-XP-Y000A	
NINGBO ULO ELECTRONICS CO.,LTD.			DWGNO.	UL01B18Y000A	
 宁波欧路电子有限公司					