

FILE: 2020-D01VUL0

REV	EC.N NO.	CONTENT	CHK	DATE
-----	----------	---------	-----	------

NOTES1:

UL Standard

1	Use group	B	C	D
	Rated Current	15A	—	10A
	Rated Voltage	300V	—	300V

IEC Standard

1	Pollution Degree	2
	Overvoltage Category	III
	Rate Impulse Voltage(KV)	4.0KV
	Rate Voltage(V)	320V
	Rate Current(A)	20A

NOTES2:

- Housing: PA66(UL94V-0)
- Solder Pin: Brass(Sn Plated)

NOTES3:

- Pitch: 3.81mm Poles:02-24P
- Operating temperature: -40℃~+105℃
- RoHS Compliance

How to order





UL0-TB13 - 15AM/3.81 - XXP - Y 0 0 0A

Certificate Factory poles
Series NO. Code

Customer requirements

color:

- 1:Grey
- 2:Blue
- 3:Black
- 4:Green
- 5:Orange
- 6:Red
- 7:transparent
- 8:Yellow
- 9:White

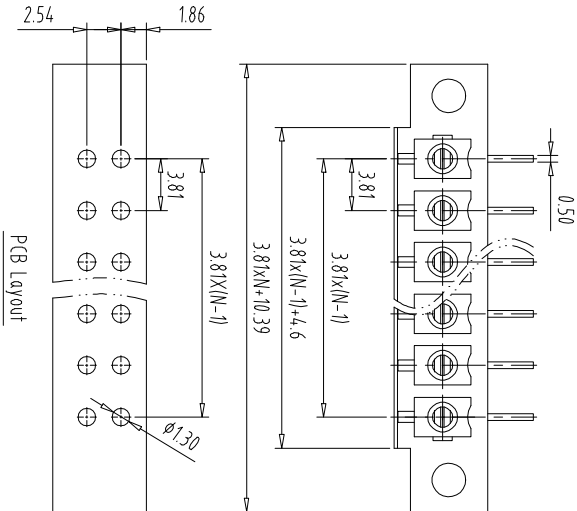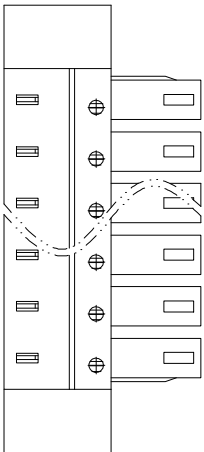

PCB Layout

Total Pitch Tolerances		Nominal dimension range		T	±	=	—	//
in mm		in mm						

over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	over	over	over	over	over	over	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	10	all	0	100	150	150	150	
± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.55	± 0.70	± 0.75	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.2	0.3	0.3	0.5	0.5	
6																										



NINGBO UL0 ELECTRONICS CO., LTD.
宁波欧路电子有限公司

DWGNO: UL0TB13Y000A

1