

		2		1	
REV	E.C.N NO.	CONTENT	CHK	DATE	

NOTES:

UL Standard

1.

Use group	B	C	D
Rated Current	15A	—	10A
Rated Voltage	300V	—	300V

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	320V
Rate Current(A)	20A

NOTES:

1.Housing: PA66(UL94V-0)

2.Solder Pin: Brass(Sn Plated)

NOTES:

1.Pitch: 3.81mm Poles:02-24P

2. Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

3. RoHS Compliance

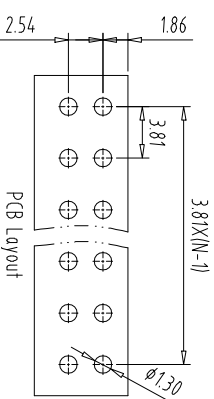




How to order

UL0-TB13	-	15A/3.81	-	XXP	-	Y	0 0 0A
----------	---	----------	---	-----	---	---	--------

Certificate Series NO.	Factory Code	poles	Customer requirements
---------------------------	-----------------	-------	--------------------------

color:

- 1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

[illegible]

ITEM	NAME OF PART	NO. OF PART	QTY	MATERIAL	NOTE
DWG.	LZW	DATE 2021.03.26	UNITS	MM	SHEET/OF 1/1
GK.		DATE	SCALE	1:1	
APP.		DATE			



NINGBO ULO ELECTRONICS CO., LTD
宁波欧路电子有限公司

DWGNO.	ULOTB13Y000A
--------	--------------