


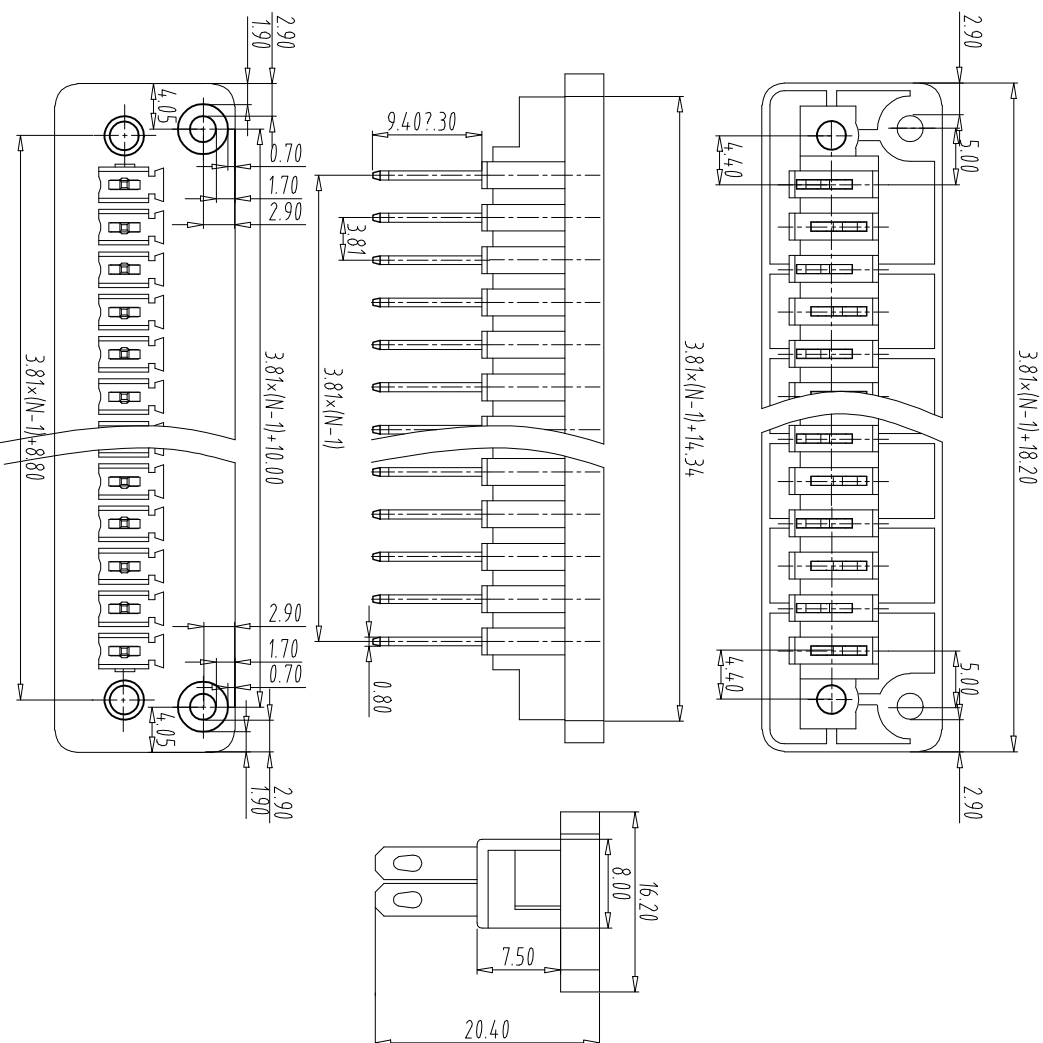

NOTES:

UL Standard

1

Use group	B	C	D
Rated Current	15A	—	10A
Rated Voltage	300V	—	300V

IEC Standard

1

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	2.0K
Rate Voltage(V)	320
Rate Current(A)	12

NOTES:

1.Housing: PA66(UL94V-0);

2.Pin: Brass(Tin Plated)

3.Nuts: Steel(M2.5)

NOTES3

1.Pitch: 3.81mm Poles: 02-24P

2. Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

3. RoHS Compliance

How to order

UL0-TB13 - 15CB/3.81 - XXP - Y 0 0 0 A

Certificate Factory poles

Series NO. Code

Customer requirements

color

1:Grey 6:Rec

2:Blue 7:transparent

3:Black 8:Yellow

4:Green 9:White

5:0range

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZw	DATE 21.05.15	UNITS	MM	SHEET/OF 1/1
CHK.		DATE	SCALE	1 : 1	A4
APP.		DATE			
NINGBO ULO ELECTRONICS CO.,LTD.			NAME ULO-BI3-IS/B3-38I-XP- Y000A		
			DWGNO. ULOTB3Y0000A		