


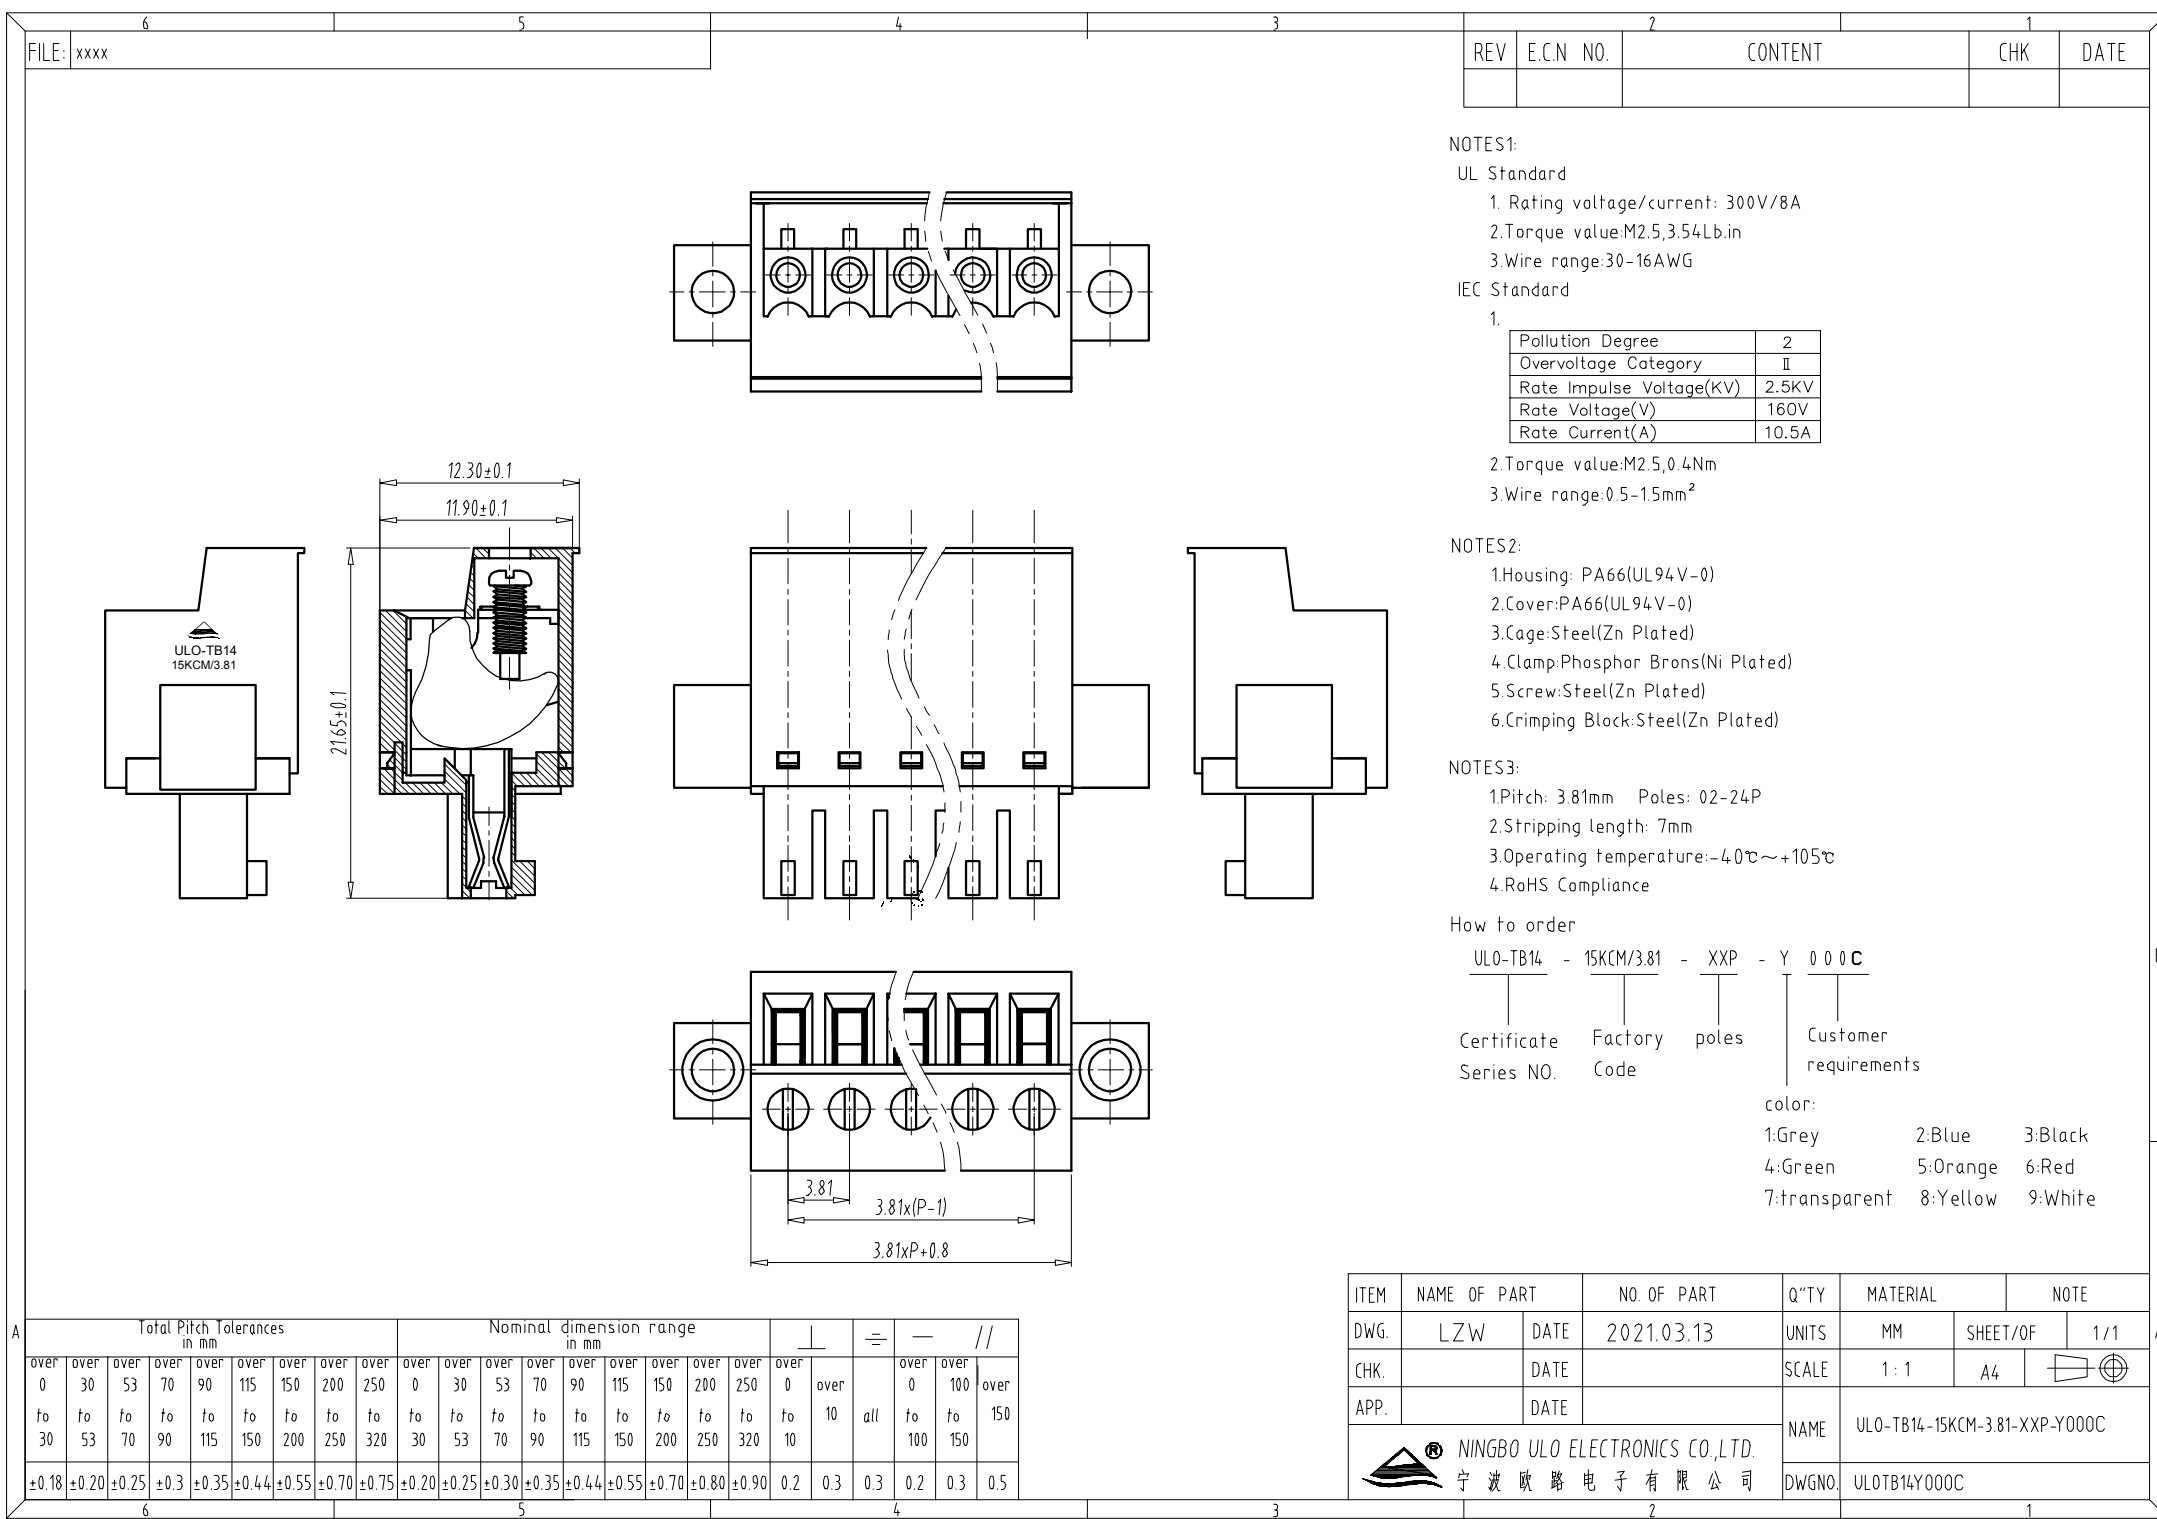

REV	E.C.N NO.	CONTENT	CHK	DATE

NOTES1:

UL Standard

1. Rating voltage/current: 300V/8A

2.Torque value:M2.5,3.54Lb.in

3.Wire range:30-16AWG

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	160V
Rate Current(A)	10.5A

2.Torque value:M2.5,0.4Nm

3.Wire range:0.5-1.5mm²

NOTES2:

1.Housing: PA66(UL94V-0)

2.Cover:PA66(UL94V-0)

3.Cage:Steel(Zn Plated)

4.Clamp:Phosphor Brons(Ni Plated)

5.Screw:Steel(Zn Plated)

6.Crimping Block:Steel(Zn Plated)

NOTES3:

1.Pitch: 3.81mm Poles: 02-24P

2.Stripping length: 7mm

3.Operating temperature:-40℃~+105℃

4.RoHS Compliance

How to order

ULO-TB14 - 15KCM/3.81 - XXP - Y 0 0 0 C

Certificate Series NO. Factory Code poles Customer requirements

color:

1:Grey 2:Blue 3:Black

4:Green 5:Orange 6:Red

7:transparent 8:Yellow 9:White

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	LZW	DATE	2021.03.13	UNITS	MM
CHK.		DATE		SCALE	1:1
APP.		DATE			
				NAME	ULO-TB14-15KCM-3.81-XXP-Y000C
				DWGNO.	ULO14Y000C