

		2		1	
REV	E.C.N NO.	CONTENT	CHK	DATE	

NOTES:

UL Standard

1.

Use group	B	C	D
Rated Current	8A	8A	8A
Rated Voltage	300V	300V	300V

2. Wire range: 28-16AWG

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	250V
Rate Current(A)	12A

2. Wire range: 0.2-1.5mm²

NOTES:

- 1.Housing:P.A66(UL 94 V-0)
- 2.Cover:P.A66(UL 94 V-0)
- 3.Clamp:Phosphor Brons(Ni Plated)
- 4.Spring:Stainless Steel
- 5.Button:P.A66(UL 94 V-0)

NOTES:

1. Pitch: 3.5mm Poles: XXP
2. Operating temperature: -40°C ~ +105°C
3. Stripping length: 9.0mm
4. RoHS Compliance

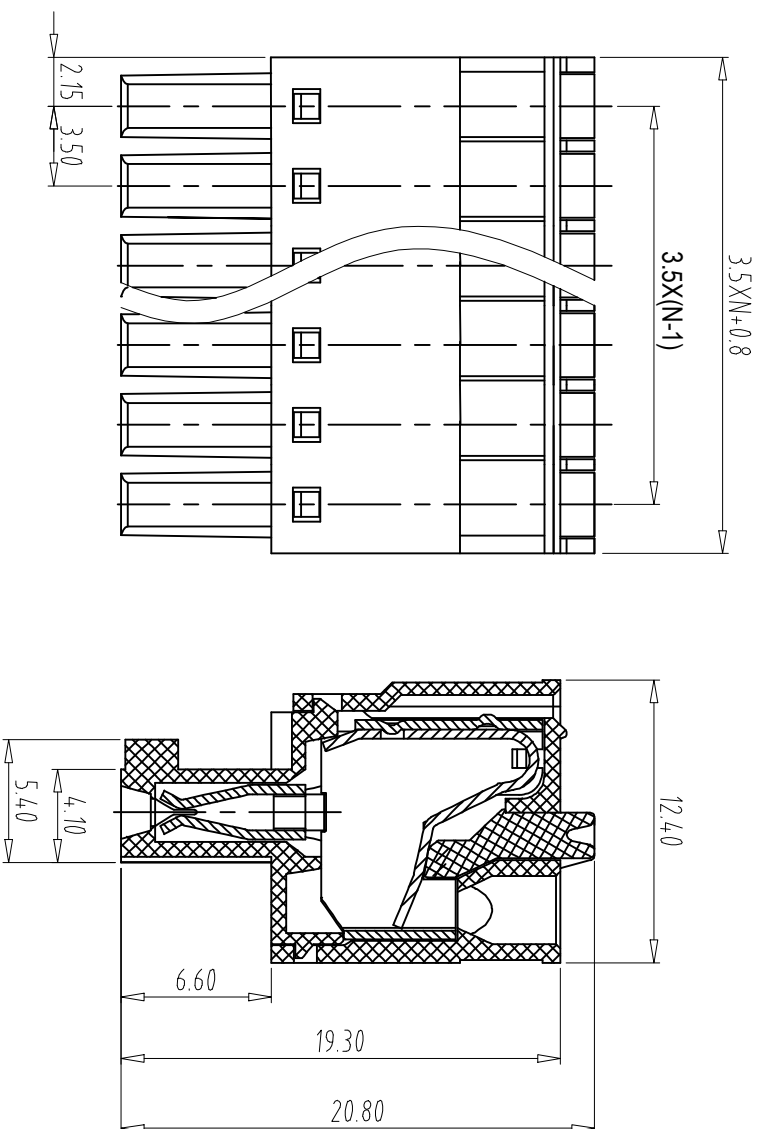
How to order

UL0-TB01	-	15KD/3.5	-	XXP	-	Y	0 0 0 A
----------	---	----------	---	-----	---	---	---------

Certificate Series NO.	Factory Code	Customer requirements
---------------------------	-----------------	--------------------------

color:

- | | | |
|----------------|-----------|----------|
| 1: Grey | 2: Blue | 3: Black |
| 4: Green | 5: Orange | 6: Red |
| 7: Transparent | 8: Yellow | 9: White |

[illegible]

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL		NOTE
DWG.	LZW	22.03.18	UNITS	MM	SHEET/OF	1/1
CHK.	DATE		SCALE	1:1	A4	
APP.	DATE					



NINGBO ULO ELECTRONICS CO., LTD
宁波欧路电子有限公司

DWGNO.	ULOTB01Y000A
--------	--------------