


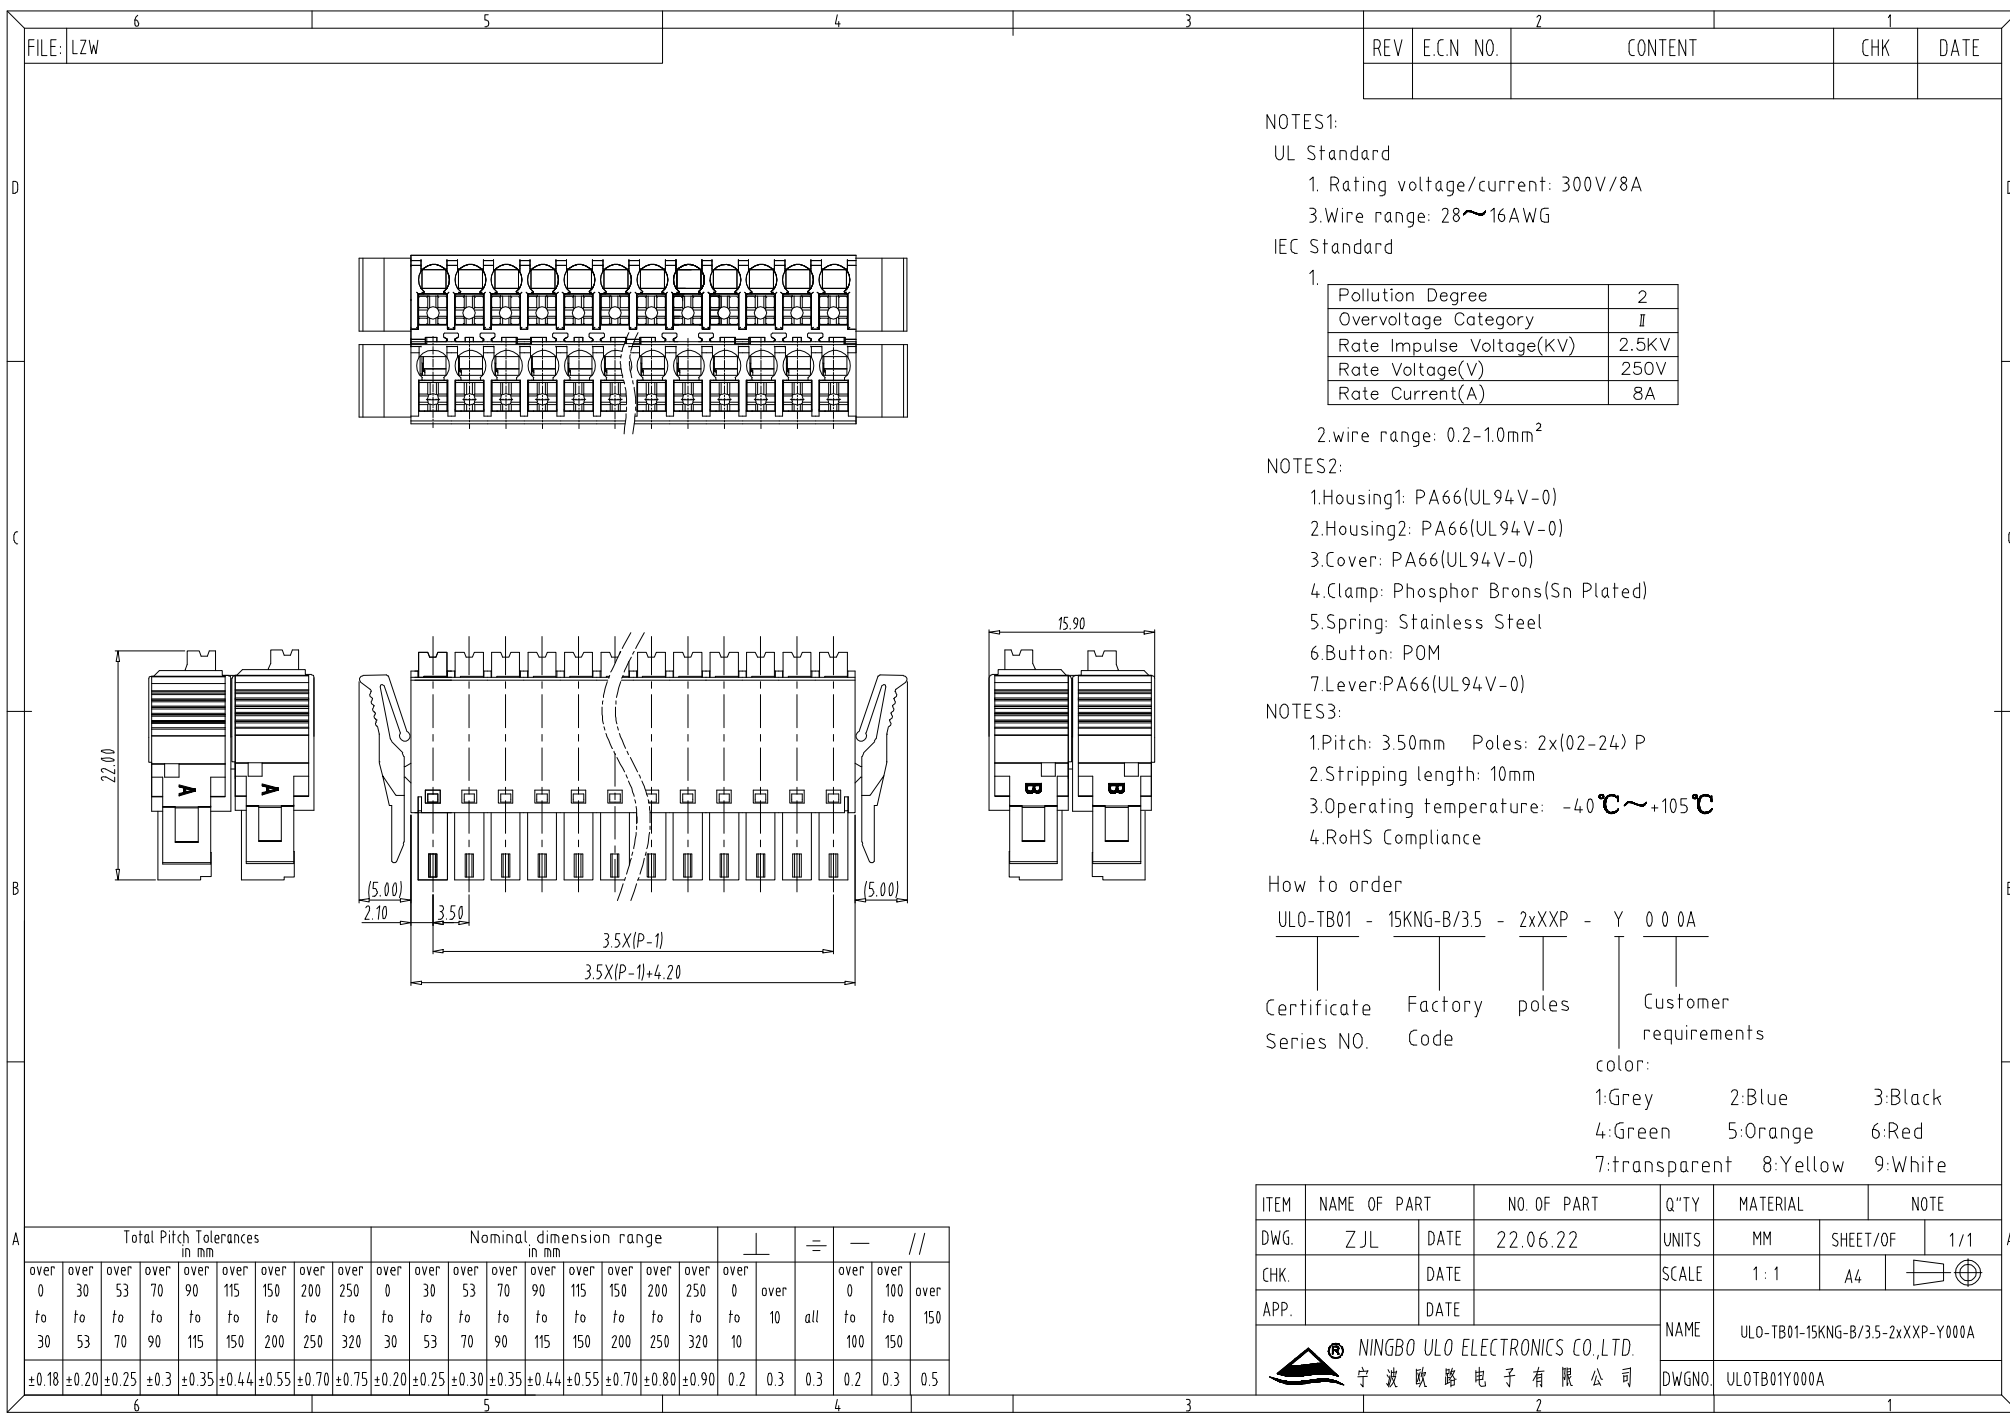

NOTES1:

- UL Standard
1. Rating voltage/current: 300V/8A
 3. Wire range: 28~16AWG
- IEC Standard
1.

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	250V
Rate Current(A)	8A

2. wire range: 0.2-1.0mm²
- NOTES2:
1. Housing1: PA66(UL94V-0)
 2. Housing2: PA66(UL94V-0)
 3. Cover: PA66(UL94V-0)
 4. Clamp: Phosphor Brons(Sn Plated)
 5. Spring: Stainless Steel
 6. Button: POM
 7. Lever: PA66(UL94V-0)

- NOTES3:
1. Pitch: 3.50mm Poles: 2x(02-24) P
 2. Stripping length: 10mm
 3. Operating temperature: -40℃~+105℃
 4. RoHS Compliance

How to order

ULO-TB01 - 15KNG-B/3.5 - 2xXXP - Y 0 0 0A

Certificate Series NO. Factory Code poles Customer requirements

color:

1:Grey 2:Blue 3:Black
4:Green 5:Orange 6:Red
7:transparent 8:Yellow 9:White

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	Z JL	DATE	22.06.22	UNITS	MM
CHK.		DATE		SCALE	1:1
APP.		DATE			
				NAME	ULO-TB01-15KNG-B/3.5-2xXXP-Y000A
				DWGNO.	ULOTB01Y000A