

UL Standard

UL Standard

Use group	B	C	D
Rated Current	10A	—	10A
Rated Voltage	300V	—	300V

2.Wire range: 16~28AWG

IEC Standard

Pollution Degree	3	2	2
Overvoltage Category	III	II	I
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	320V
Rate Current(A)	13.4A	13.4A	13.4A

2.wire range: 0.2-1.5mm²

NOTES2:

- 1.Housing: PA66-GF(UL94V-0)
- 2.Button: PA66-GF(UL94V-0)
- 3.Clamp: Copper alloy(Sn Plated)
- 4.Spring: Stainless steel
- 5.Cover: PA66-GF(UL94V-0)
- 6.HAandle: PA66-GF(UL94V-0)

NOTES3:

- 1.Pitch: 3.5mm Poles: 2X(02-24)P
2.Stripping length: 10-11mm
3.Operating temperature: -40℃~+105℃
4.RoHS Compliance

How to order

ULO-TB01 - 15KNHBG/3.5 - 2xXXP - Y 0 0 0 A

Certificate	Factory	poles
Series NO.	Code	

Customer requirements

— color:

- 1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange


ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL		NOTE	
DWG.	LZW	DATE	21.04.28	UNITS	MM	SHEET/OF		1/1
CHK.		DATE		SCALE	1:1	A4		
APP.		DATE		NAME	UL0-TB01-15KNHBG/3.5-2xXXP-Y000A			
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司					DWGNO.	UL0TB01Y000A		



NINGBO ULO ELECTRONICS CO.,LTD.

宁波欧路电子有限公司

DWGNO.	ULOTB01Y000A
--------	--------------

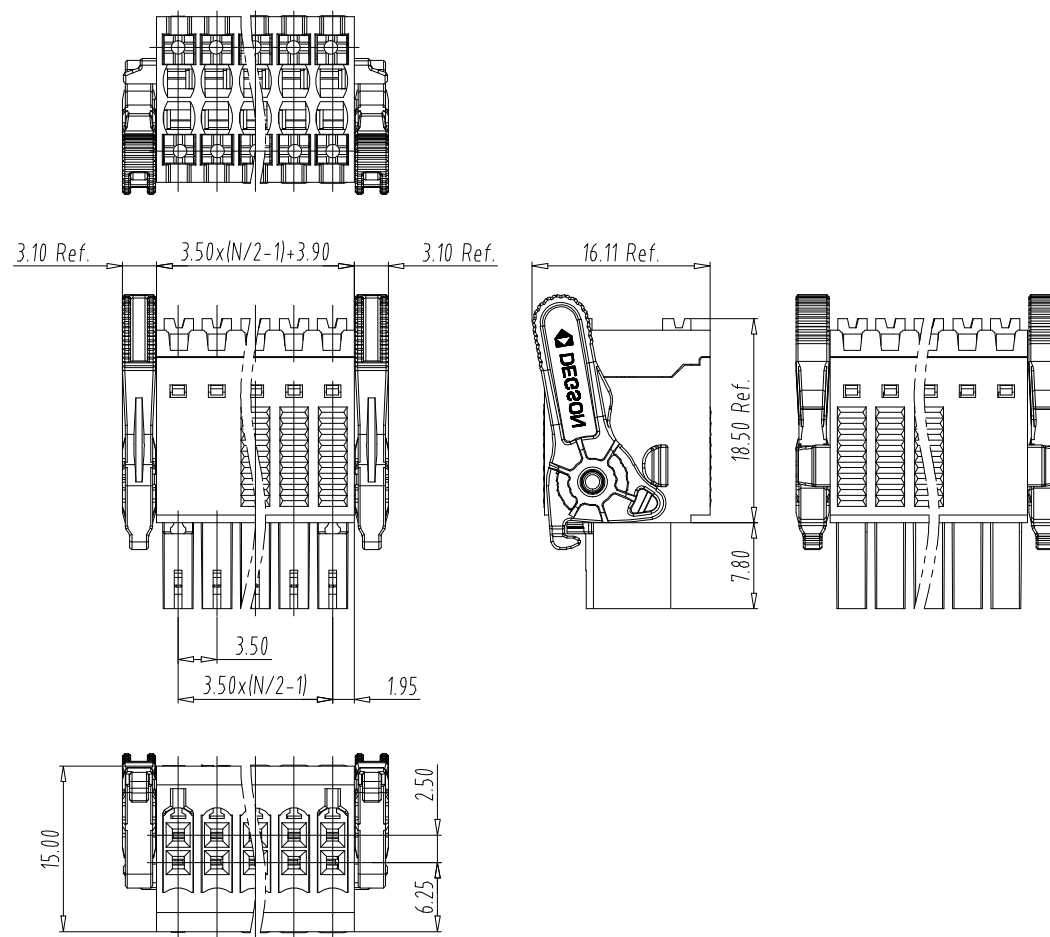

A	Total Pitch Tolerances in mm									Nominal dimension range in mm									$\perp$		$\equiv$	$-$ //		
	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 0	over 10		over 0	over 100	over 150
	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10		all	to 100	to 150	to 500
	± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.55	± 0.70	± 0.75	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.2	0.3	0.5