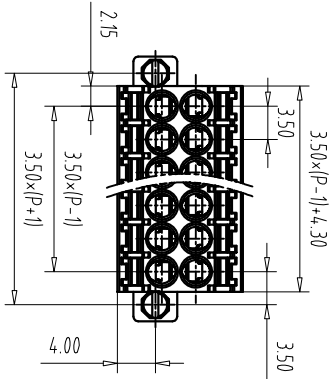


NOTES:

UL Standard

1. Use group	B	C	D
Rated Current	8A	8A	8A
Rated Voltage	150V	50V	150V

2. Wire range: 16~24AWG

IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	250V
Rate Current(A)	8A	8A	8A

2. wire range: 0.2~1.5mm², 1.5mm² sol

3. Rating voltage/current: 160V/8A

NOTES2:

1. Housing: PA66 (UL94V-0)

2. Cover: PA66 (UL94V-0)

3. Button: POM

4. Conductor: Phosphor Brons (Sn Plated)

5. Spring: Stainless Steel

5. Screw: Steel (Zn Plated)

NOTES3:

1. Pitch: 3.50mm Poles: 2x(02-24)P

2. Stripping length: 9-10mm

3. Operating temperature: -40℃~+105℃

4. RoHS Compliance

How to order

UL0-TB01 - 15KNHM/3.5 - 2XXP - Y 0 0 0 A

Certificate Factory poles
Series NO. Code

Customer requirements

color:

1: Grey 5: Orange

2: Blue 6: Red

3: Black 7: transparent

4: Green 8: Yellow

9: White

Total Pitch Tolerances

Nominal dimension range

0.18±0.20	0.25±0.3	0.35±0.44	0.55±0.70	0.75±0.20	0.25±0.30	0.35±0.44	0.55±0.70	0.80±0.90	0.2	0.3	0.2	0.3	0.5
over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	over	0	100	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to
53	70	90	115	150	200	250	300	320	10	100	150		