

UL Standard

1.

Use group	B	C	D
Rated Current	8A	—	8A
Rated Voltage	300V	—	300V

2.Wire range: 26~16AWG

IEC Standard

1.

Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	250V
Rate Current(A)	8A	8A	8A

2. wire range: 0.2-1.0mm²

NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Cover: PA66(UL94V-0)
- 3.Clamp: Phosphor Brons(Sn Plated)
- 4.Spring: Stainless Steel
- 5.Button: POM
- 6.Screw:Steel(Zn Plated)

NOTES3:

- 1.Pitch: 3.50mm Poles: 02-24P
2.Stripping length: 10mm
3.Operating temperature: -40℃~+105℃
4.RoHS Compliance

How to order





ULO-TB01 - 15KNM/3.5 - XXP - Y 0 0 0A

Certificate Series NO.	Factory Code	poles	Customer requirements
---------------------------	-----------------	-------	--------------------------

```
color:
```

1:Grey 2:Blue 3:Black
4:Green 5:Orange 6:Red
7:transparent 8:Yellow 9:White

ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL		NOTE	
DWG.	LZW	DATE	21.11.01	UNITS	MM	SHEET/OF		1/1
CHK.		DATE		SCALE	1:1	A4		
APP.		DATE			ULO-TB01-15KNM/3.5-XXP-Y000A			
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司				NAME				
				DWGNO	ULOTB01Y000A			

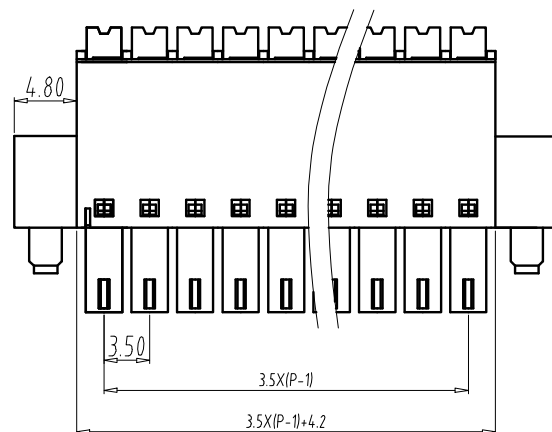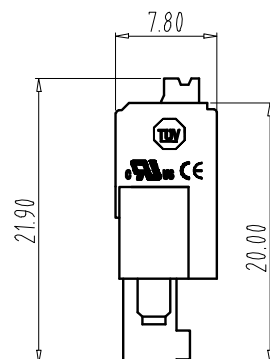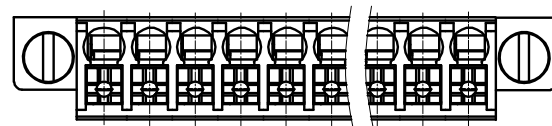

A	Total Pitch Tolerances in mm									Nominal dimension range in mm									$\perp$		$\equiv$		$-$		$//$	
	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 0	over 10			over 0	over 100	over 150	
	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10	to 10	all		to 100	to 150	to 200	
	± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.55	± 0.70	± 0.75	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3		0.2	0.3	0.5	