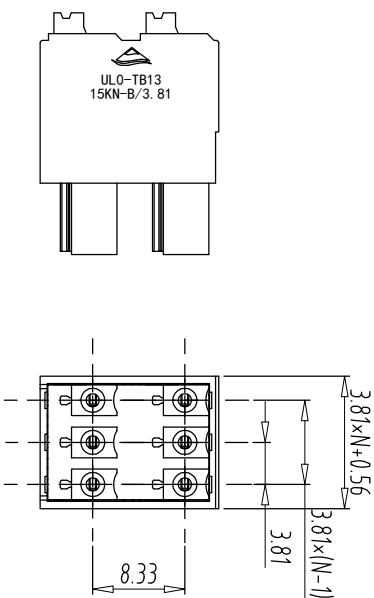




NOTES:

2. wire range: $0.2 \sim 1.0 \text{ mm}^2$, 1.5 mm^2 sol

NOTES:

- 1.Housing: PA66 (UL94V-0)
- 2.Cover: PA66 (UL94V-0)
- 3.Button: POM
- 4.Conductor: Phosphor Brons (Sn Plated)
- 5.Spring: Stainless Steel

NOTES

- 1.Pitch: 381mm Poles: 2x(02-24)P
- 2.Stripping length: 8--9mm
- 3.Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
- 4.RoHS Compliance

How to order

ULO-TB13 - 15KN-B/3.81 - 2xXXP - Y 0 0 0A

Certificate Series NO.	Factory Code	poles

Customer requirements

color:

- | | |
|---------|---------------|
| 1:Grey | 5:Orange |
| 2:Blue | 6:Red |
| 3:Black | 7:transparent |
| 4:Green | 8:Yellow |

1. Pollution Degree	2	2	3
---------------------	---	---	---

Overvoltage Category	I	II	III
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	320V	160V	160V
Rate Current(A)	8A	8A	8A

NOTES:

UL Standard

1. Rating voltage/current: 300V/8A
2. withstanding voltage: AC1600V/1Min
3. Wire range: 16~24AWG

IEC Standard

ITEM	NAME OF PART	NO. OF PART	QTY: WHOLE		NOTE
DWG.	CKK	DATE 20.12.10	UNITS	MM	SHEET/OF
CHK.	DATE		SCALE	1 : 1	A4 

APP.	DATE	NAME
------	------	------



NINGBO ULO ELECTRONICS CO., LTD.
宁波欧路电子有限公司

NG 100

ULOTB01Y000A

1000