
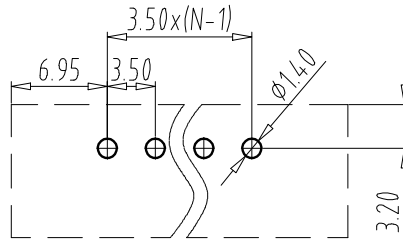



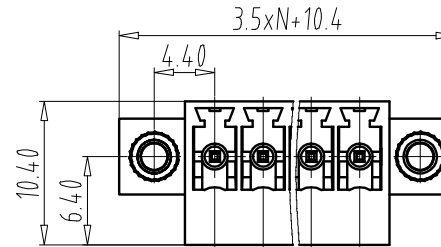


FILE: 2021-D01VUL0

REV	E.C.N NO.	CONTENT	CHK	DATE



PCB LAYOUT

NOTES1:

UL Standard

1.

Use group	B	C	D
Rated Current	8A	-	8A
Rated Voltage	300V	-	300V

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	250V
Rate Current(A)	12A

NOTES2:

- Housing1: PA66(UL94V-0)
- Pin: Copper alloy(Sn Plated)
- Nut: Copper alloy

NOTES3:

- Pitch: 3.5mm Poles: 02-24P
- Operating temperature: -40℃~+105℃
- RoHS Compliance

How to order

UL0-TB01 - 15LM/3.5 - XXP - Y 0 0 0 A

Certificate Factory poles Customer requirements

Series NO. Code

- color:
- 1:Grey 6:Red
 - 2:Blue 7:transparent
 - 3:Black 8:Yellow
 - 4:Green 9:White
 - 5:Orange

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	LZW	DATE	22.07.04	UNITS	MM
CHK.	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	UL0-TB01-15LM/3.5-XXP-Y000A		
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司		DWGNO.	UL0TB01Y000A		