
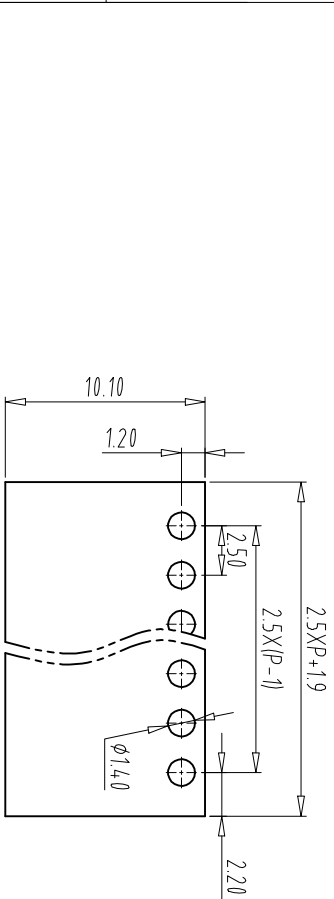
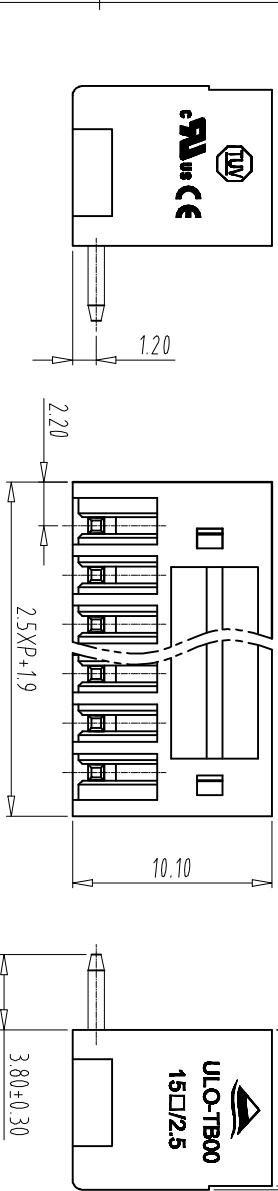


FILE: 2021-D01VUL0

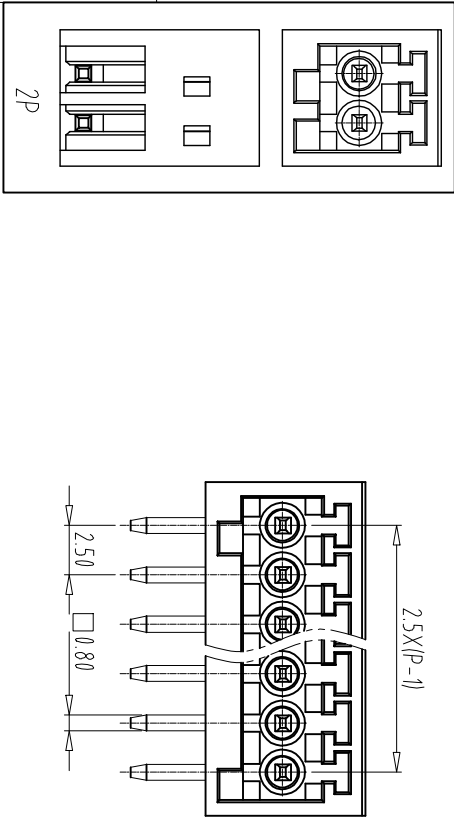

PCB Layout

Total Pitch Tolerances		Nominal dimension range							
in mm		in mm							
over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0
to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	10
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20
±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30
±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44
±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70
±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90
0.2	0.3	0.3	0.3	0.2	0.3	0.3	0.2	0.3	0.5

REV	EC.N NO.	CONTENT	CHK	DATE
-----	----------	---------	-----	------

NOTES1:

UL Standard

1. Use group	B	C	D
Rated Current	4A	4A	4A
Rated Voltage	150V	150V	150V

IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	—	—	2.5KV
Rate Voltage(V)	—	—	250V
Rate Current(A)	—	—	5A

NOTES2:

1.Housing: PA66(UL94V-0)

2.Solder Pin: Brass(Sn Plated)

NOTES3:

1.Pitch: 2.50mm Poles: 02-24P

2.Operating temperature: -40℃~+105℃

3.RoHS Compliance

How to order

UL0-TB00 - 15RC/2.5 - XXP - Y 0 0 0A

Certificate Factory poles Customer

Series NO. Code requirements

color:

1:Grey 2:Blue 3:Black

4:Green 5:Orange 6:Red

7:transparent 8:Yellow 9:white

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	22.02.22	UNITS	MM
CHK.	DATE	SCALE	1:1	SHEET/OF	1/1
APP.	DATE	NAME	UL0-TB00-15RC/2.5-XXP-Y000A		

NINGBO UL0 ELECTRONICS CO.,LTD.

DWGNO. UL0TB00Y000A