

FILE: 2020-D01VUL0

REV	EC.N NO.	CONTENT	CHK	DATE

NOTES1:

UL Standard

1. Rating voltage/current: 300V/8A

IEC Standard

1.

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	250V
Rate Current(A)	7A

NOTES2:

1.Housing: PA66(UL94V-0)

2.Cover: PA66(UL94V-0)

3.Solder Pin1: Brass(Sn Plated)

4.Solder Pin2: Brass(Sn Plated)

NOTES3:

1.Pitch: 350mm Poles: 2X(02-24)P

2.Operating temperature: -40℃~+105℃

3.RoHS Compliance

How to order




UL0-TB02 - 15RH/3.5 - 2*XXP - Y 0 0 0A

Certificate Factory poles
Series NO. Code

Customer requirements

color:

- 1:Grey 6:Red
- 2:Blue 7:transparent
- 3:Black 8:Yellow
- 4:Green 9:White
- 5:Orange

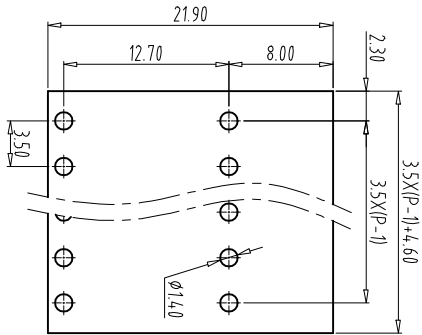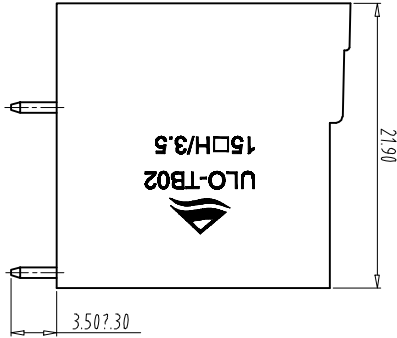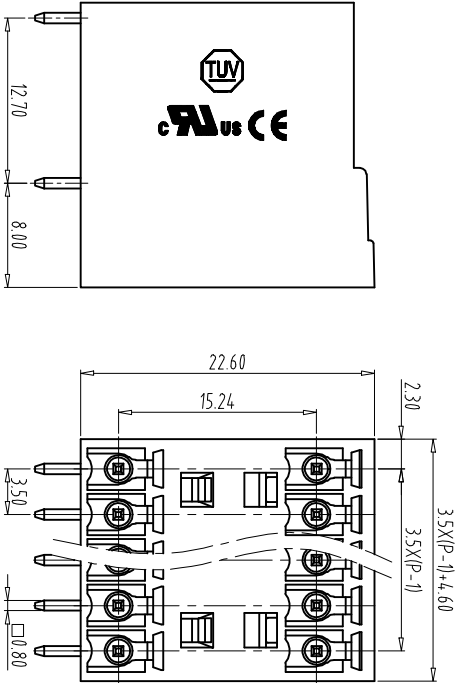

PCB Layout

Total Pitch Tolerances		Nominal dimension range									
in mm		in mm									
over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53
to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30
±0.35	±0.44	±0.55	±0.70	±0.75	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3
0.2	0.3	0.3	0.2	0.3	0.5						

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	ZJL	DATE	20.12.25	UNITS	MM
CHK.	DATE	SCALE	1 : 1	A4	1/1
APP.	DATE	NAME	UL0-TB02-15RH/3.5-2*XXP-Y000A		

NINGBO UL0 ELECTRONICS CO.,LTD.

UL0TB02Y000A