
FILE: 2021-D01\ULO

| REV | E.C.N NO. | CONTENT | CHK | DATE |
|---|---|---|---|---|
| | | | | |

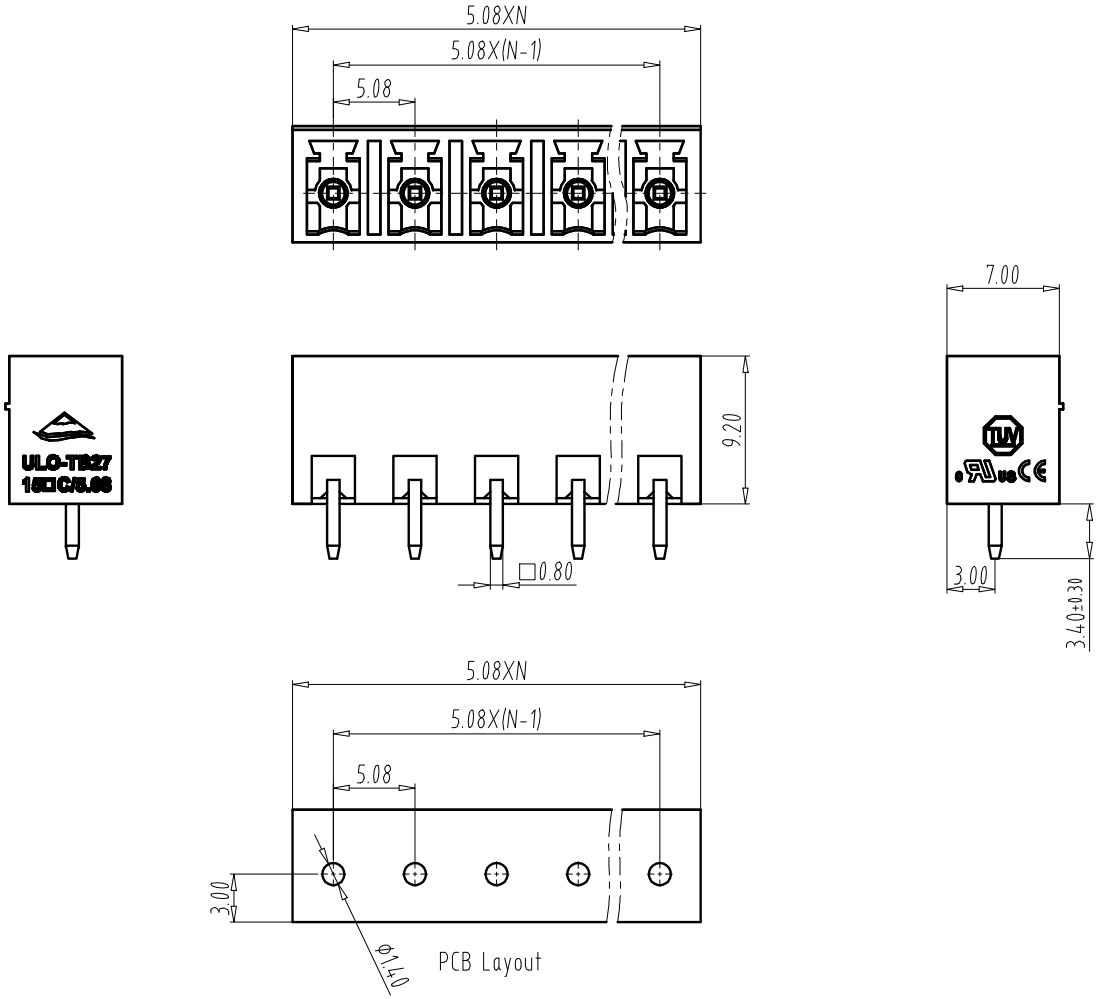


NOTES1:

UL Standard

1.

| Use group | B | C | D |
|---|---|---|---|
| Rated Current | 8A | – | 8A |
| Rated Voltage | 300V | – | 300V |

IEC Standard

1.

| | |
|---|---|
| Pollution Degree | 2 |
| Overvoltage Category | Ⅱ |
| Rate Impulse Voltage(KV) | 4KV |
| Rate Voltage(V) | 450V |
| Rate Current(A) | 7A |

NOTES2:

1.Housing: PA66(UL94V-0)

2.Solder Pin: Brass(Sn Plated)

NOTES3:

1.Pitch: 5.08mm Poles: 02-24P

2.Operating temperature: -40℃～+105℃

3.RoHS Compliance

How to order

ULO-TB27 - 15VC/5.08 - XXP - Y 0 0 0 A

- ULO-TB27: Certificate Series NO.
- 15VC/5.08: Factory Code
- XXP: poles
- Y 0 0 0 A: Customer requirements
  - color:
    - 1:Grey
    - 2:Blue
    - 3:Black
    - 4:Green
    - 5:Orange
    - 6:Red
    - 7:transparent
    - 8:Yellow
    - 9:White

| Total Pitch Tolerances in mm | | | | | | | | | Nominal dimension range in mm | | | | | | | | | ⊥ | | ≑ | — // | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| over 0 to 30 | over 30 to 53 | over 53 to 70 | over 70 to 90 | over 90 to 115 | over 115 to 150 | over 150 to 200 | over 200 to 250 | over 250 to 320 | over 0 to 30 | over 30 to 53 | over 53 to 70 | over 70 to 90 | over 90 to 115 | over 115 to 150 | over 150 to 200 | over 200 to 250 | over 250 to 320 | over 0 to 10 | over 10 | all | over 0 to 100 | over 100 to 150 | over 150 |
| ±0.18 | ±0.20 | ±0.25 | ±0.3 | ±0.35 | ±0.44 | ±0.55 | ±0.70 | ±0.75 | ±0.20 | ±0.25 | ±0.30 | ±0.35 | ±0.44 | ±0.55 | ±0.70 | ±0.80 | ±0.90 | 0.2 | 0.3 | 0.3 | 0.2 | 0.3 | 0.5 |

| ITEM | NAME OF PART | | NO. OF PART | Q"TY | MATERIAL | NOTE |
|---|---|---|---|---|---|---|
| DWG. | LZW | DATE | 2022.05.27 | UNITS | MM | SHEET/OF 1/1 |
| CHK. | | DATE | | SCALE | 1 : 1 | A4 |
| APP. | | DATE | | NAME | ULO-TB27-15VC/5.08-XXP-Y000A | |
| NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司 | | | | DWGNO. | ULOTB27Y000A | |