


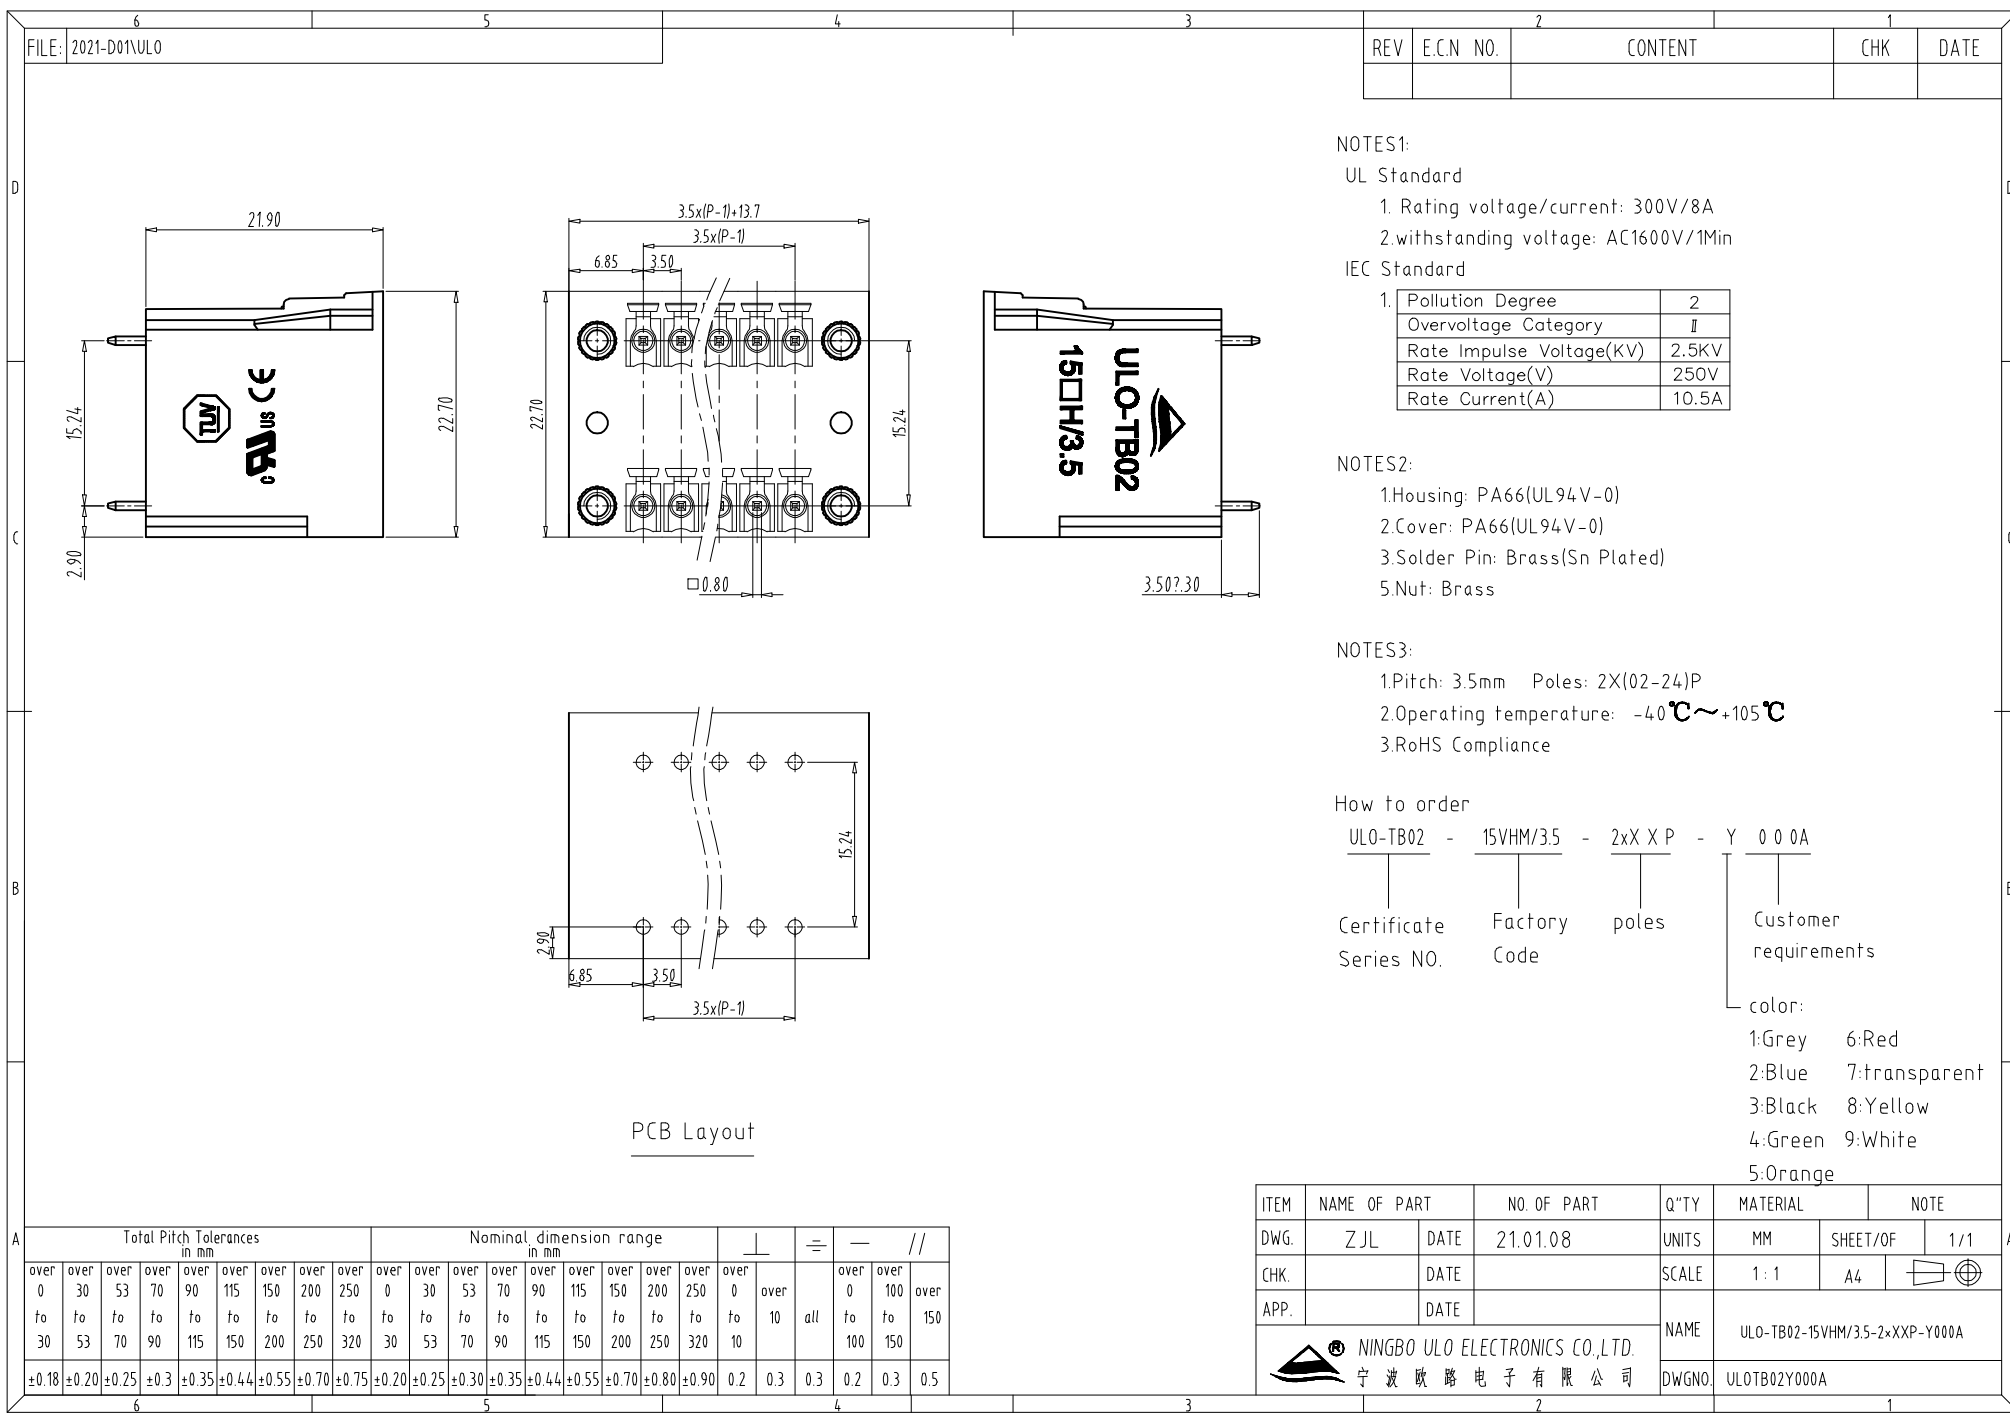

FILE: 2021-D01\ULO

REV	E.C.N NO.	CONTENT	CHK	DATE

NOTES1:

UL Standard

1. Rating voltage/current: 300V/8A
- 2.withstanding voltage: AC1600V/1Min

IEC Standard

1. Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	250V
Rate Current(A)	10.5A

NOTES2:

- 1.Housing: PA66(UL94V-0)
- 2.Cover: PA66(UL94V-0)
- 3.Solder Pin: Brass(Sn Plated)
- 5.Nut: Brass

NOTES3:

- 1.Pitch: 3.5mm Poles: 2X(02-24)P
- 2.Operating temperature: -40℃~+105℃
- 3.RoHS Compliance

How to order

ULO-TB02 - 15VHM/3.5 - 2xX X P - Y 0 0 0 A

Certificate
Series NO.

Factory
Code

poles

Customer
requirements

color:

- 1:Grey 6:Red
- 2:Blue 7:transparent
- 3:Black 8:Yellow
- 4:Green 9:White
- 5:Orange

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	Z JL	DATE	21.01.08	UNITS	MM
CHK.		DATE		SCALE	1:1
APP.		DATE			
				NAME	ULO-TB02-15VHM/3.5-2xXXP-Y000A
				DWGNO.	ULOTB02Y000A



NINGBO ULO ELECTRONICS CO.,LTD.

宁波欧路电子有限公司