


FILE: 2021-D01VULO					
REV	EC.N NO.	CONTENT	CHK	DATE	

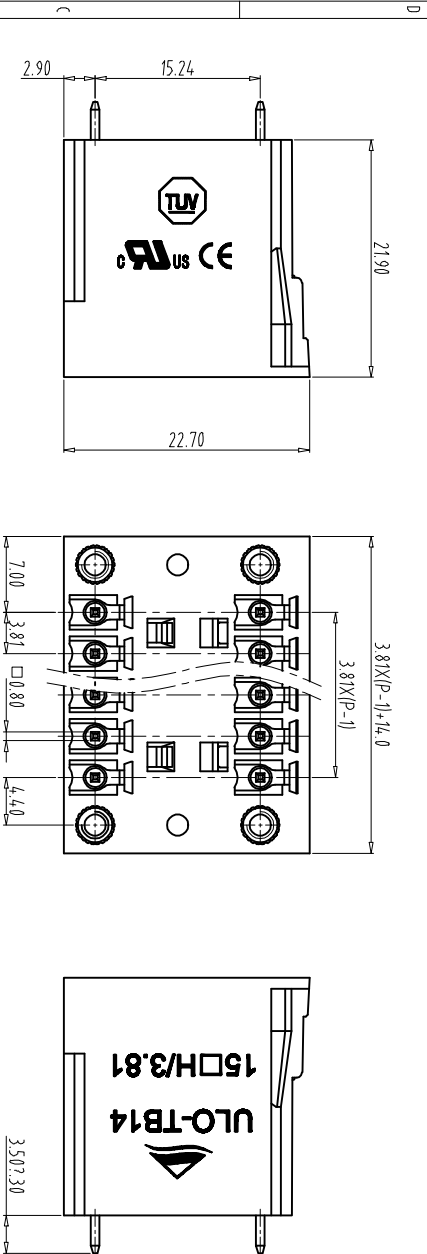

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	250V
Rate Current(A)	7A

NOTES1:
UL Standard
1. Rating voltage/current: 300V/8A
IEC Standard


NOTES2:
1.Housing: PA66(UL94V-0)
2.Cover: PA66(UL94V-0)
3.Solder Pin: Brass(Sn Plated)
5 Nut: Brass

NOTES3:
1.Pitch: 3.81mm Poles: 2X(02-24/P
2.Operating temperature: -40℃~+105℃
3.RoHS Compliance

How to order
ULO-TB14 - 15VHM/3.81 - 2XX X P - Y 0 0 0A
Certificate Factory poles
Series NO. Code requirements

color:
1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

PCB Layout

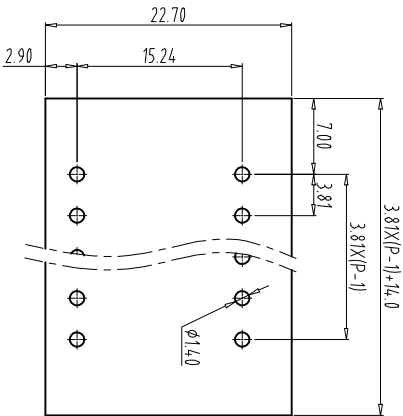

A											
Total Pitch Tolerances in mm					Nominal dimension range in mm						
over	over	over	over	over	over	over	over	over	over	—	//
0	30	53	70	90	115	150	200	250	0	30	53
to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70
to	to	to	to	to	to	to	to	to	to	to	to
6					5					4	