
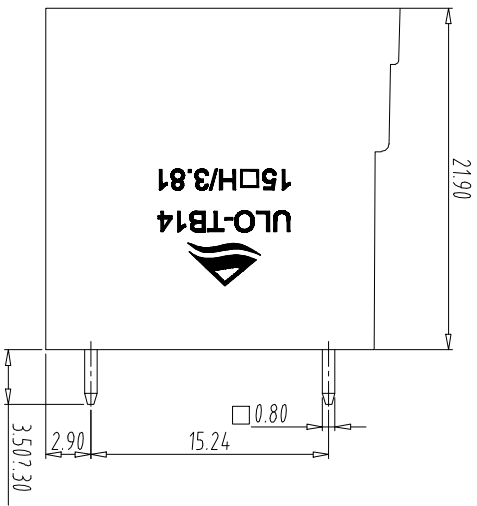


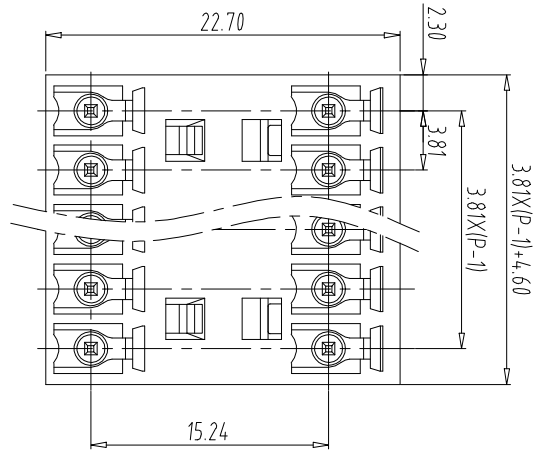

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	250V
Rate Current(A)	7A

NOTES1:
UL Standard
1. Rating voltage/current: 300V/8A
IEC Standard
1.

NOTES2:
1.Housing: PA66(UL94V-0)
2.Cover: PA66(UL94V-0)
3.Solder Pin: Brass(Sn Plated)

NOTES3:
1.Pitch: 381mm Poles: 2X(02-24)P
2.Operating temperature: -40℃~+105℃
3.RoHS Compliance

How to order
ULO-TB14 - 15VH/381 - 2xXXP - Y 0 0 0A


Certificate Factory poles
Series NO. Code Customer requirements

color:
1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

PCB Layout

Total Pitch Tolerances												Nominal dimension range																				
in mm												in mm																				
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	over	over	over	over	over	over	over	over	over	over	over	over	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	all	0	100	150	100	150	100	150	100	150	100	150	100	150
+0.18	+0.20	+0.25	+0.3	+0.35	+0.44	+0.55	+0.70	+0.75	+0.20	+0.25	+0.30	+0.35	+0.44	+0.55	+0.70	+0.80	+0.90	0.2	0.3	0.3	0.2	0.3	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.06.24	UNITS	MM
CHK.	DATE	SCALE	1:1	SHEET/OF	1/1
APP.	DATE	NAME	ULO-TB14-15VH/381-2xXXP-Y000A		



NINGBO ULO ELECTRONICS CO.,LTD.

UL0TB14Y000A