
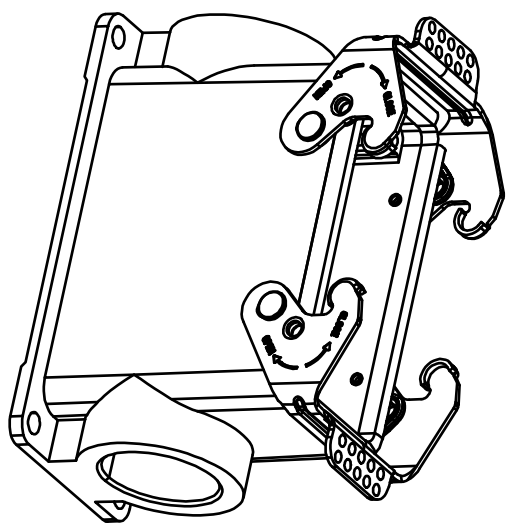
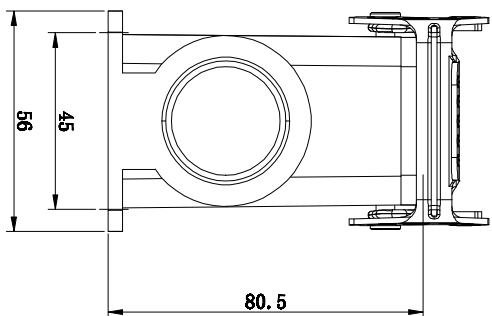


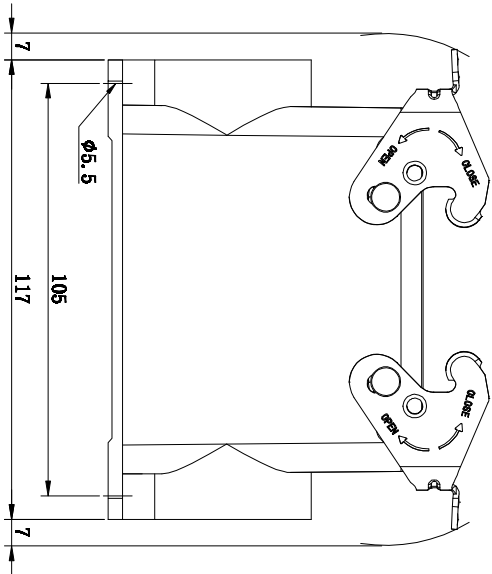

REV	E.C.N NO.	CONTENT	CHK	DATE
Type			Thread size (M/Pg)	
UL0-HC07-H16B-SFH-2L-M25			M25	
UL0-HC07-H16B-SFH-2L-2M25			2M25	
UL0-HC07-H16B-SFH-2L-M32			M32	
UL0-HC07-H16B-SFH-2L-2M32			2M32	
UL0-HC07-H16B-SFH-2L-M40			M40	
UL0-HC07-H16B-SFH-2L-2M40			2M40	
UL0-HC07-H16B-SFH-2L-PG29			PG29	
UL0-HC07-H16B-SFH-2L-2PG29			2PG29	
UL0-HC07-H16B-SFH-2L-PG29			PG29	
UL0-HC07-H16B-SFH-2L-2PG29			2PG29	

Technical specification:

- Material: Aluminium die-cast
- Surface: powder-coated
- Colour: (grey)
- Temperature range: -40°C - +125°C
- Degree of Protection: IP65 (acc. to IEC 60529 for coupled connector)
- Locking element: locking type: double locking latch material: metal galvanized/nickel plating
- Cable entry: side entry
- No. of cable entries: 1/2
- Thread size: M/Pg
- Hoods/Housings sealing: NBR

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL		NOTE	
DWG.	SWL	DATE	2023.12.9	UNITS	MM	SHEET/OF	1/1
CHK.	DATE			SCALE	1:1	A4	
APP.	DATE			UL0-HC07-H16B-SFH-2L-XX			
NINGBO UL0 ELECTRONICS CO.,LTD. 宁波欧路电子有限公司							
				DWGNO.			