



| REV                       | E.C.N NO. | CONTENT | CHK                   | DATE |
|---------------------------|-----------|---------|-----------------------|------|
| Type                      |           |         | Thread size<br>(M/Pg) |      |
| UL0-HC07-H16B-SEH-4B-M25  |           |         | M25                   |      |
| UL0-HC07-H16B-SEH-4B-M32  |           |         | M32                   |      |
| UL0-HC07-H16B-SEH-4B-M40  |           |         | M40                   |      |
| UL0-HC07-H16B-SEH-4B-PG21 |           |         | PG21                  |      |
| UL0-HC07-H16B-SEH-4B-PG29 |           |         | PG29                  |      |

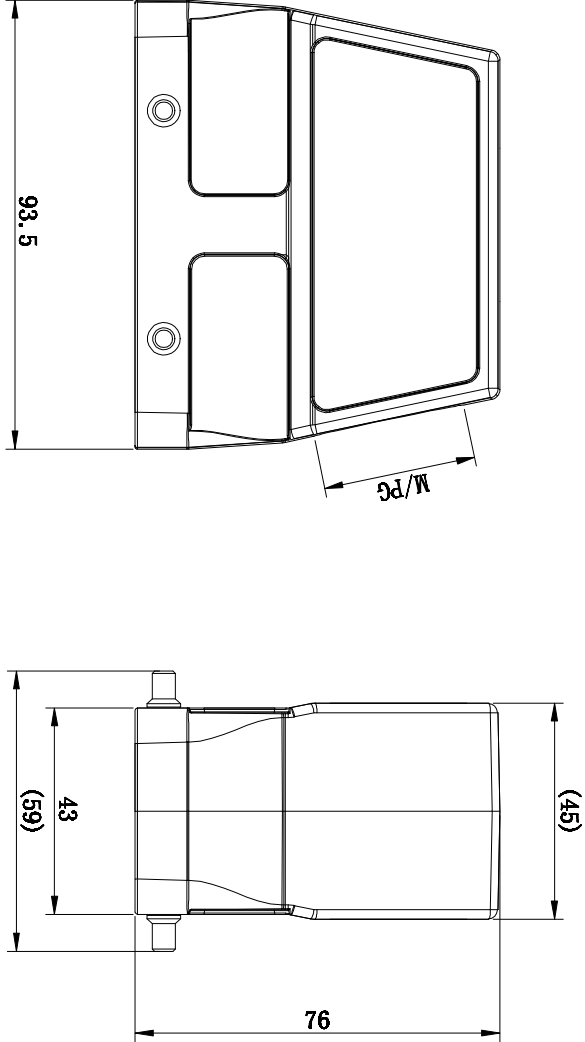

Technical specification:

1. Material: Aluminium die-cast
2. Surface: powder-coated
3. Colour: (grey)
4. Temperature range: -40℃ - +125℃
5. Degree of Protection: IP65  
(acc. to IEC 60529 for coupled connector)
6. Cable entry: side entry
7. Thread size: M/Pg

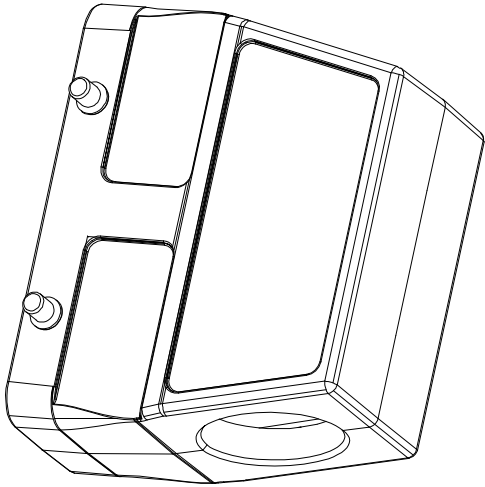

| ITEM                            | NAME OF PART | NO. OF PART | Q'TY                    | MATERIAL | NOTE |
|---------------------------------|--------------|-------------|-------------------------|----------|------|
| DWG.                            | SWL          | DATE        | 2023.12.9               | UNITS    | MM   |
| CHK.                            | DATE         | SCALE       | 1:1                     | A4       | 1/1  |
| APP.                            | DATE         | NAME        | UL0-HC07-H16B-SEH-4B-XX |          |      |
| NINGBO UL0 ELECTRONICS CO.,LTD. |              |             |                         | DWGNO.   |      |



宁波欧路电子有限公司