



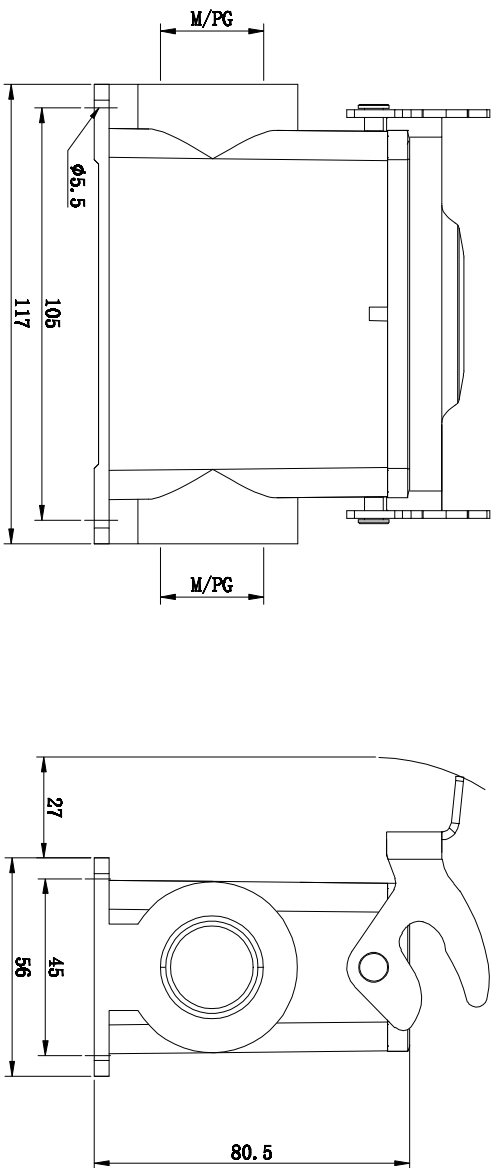

REV	E.C.N NO.	CONTENT	CHK	DATE
Type			Thread size (M/PG)	
UL0-HC07-H16B-SFH-1L-M25			M25	
UL0-HC07-H16B-SFH-1L-2M25			2M25	
UL0-HC07-H16B-SFH-1L-M32			M32	
UL0-HC07-H16B-SFH-1L-2M32			2M32	
UL0-HC07-H16B-SFH-1L-PG21			PG21	
UL0-HC07-H16B-SFH-1L-2PG21			2PG21	
UL0-HC07-H16B-SFH-1L-PG29			PG29	
UL0-HC07-H16B-SFH-1L-2PG29			2PG29	

Technical specification:

1. Material: Aluminium die-cast
2. Surface: powder-coated
3. Colour: (grey)
4. Temperature range: -40℃ - +125℃
5. (acc. to IEC 60629 for coupled connector)
6. Locking element:
locking type: single locking latch
material: metal galvanized/nickel plating
7. Cable entry: side entry
8. Thread size: M/PG
9. Hoods/Housings sealing: NBR

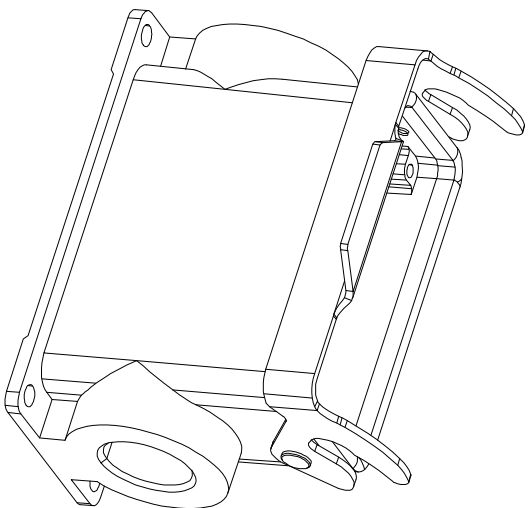

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL		NOTE
DWG.	SWL	DATE	2023.12.9	UNITS	MM	SHEET/OF 1/1
CHK.		DATE		SCALE	1:1	A4
APP.		DATE				
				NAME		
				DWGNO		
				UL0-HC07-H16B-SFH-1L-XX		
				NINGBO UL0 ELECTRONICS CO.,LTD.		
				宁波欧路电子有限公司		
				DWGNO		