



REV	E.C.N NO.	CONTENT	CHK	DATE
		Type	Thread size (M/Pg)	
		UL0-HC07-H16B-TEH-2L-M32	M32	
		UL0-HC07-H16B-TEH-2L-M40	M40	
		UL0-HC07-H16B-TEH-2L-PG21	PG21	
		UL0-HC07-H16B-TEH-2L-PG29	PG29	

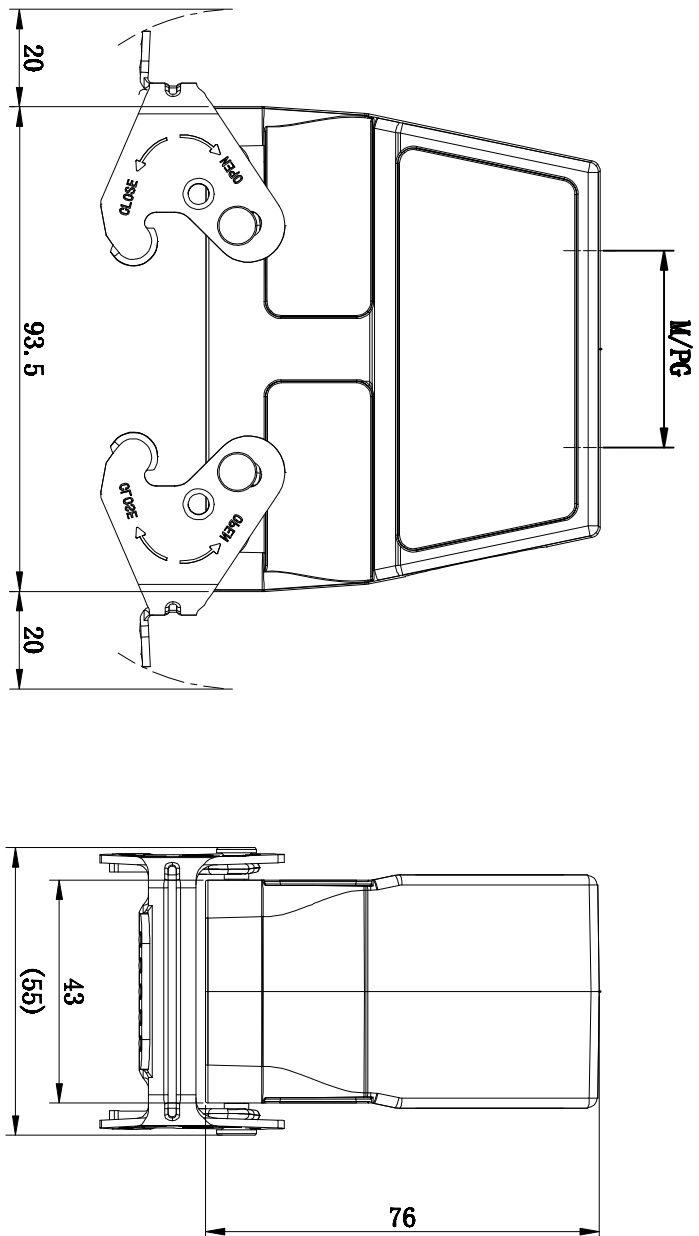

Technical specification:

1. Material: Aluminium die-cast
2. Surface: powder-coated
3. Colour: (grey)
4. Temperature range: -40℃ - +125℃
5. Degree of Protection: IP65
(acc. to IEC 60529 for coupled connector)
6. Locking element:
locking type: double locking latch
material: metal galvanized/nickel plating
7. Cable entry: top entry
8. Thread size: M/Pg

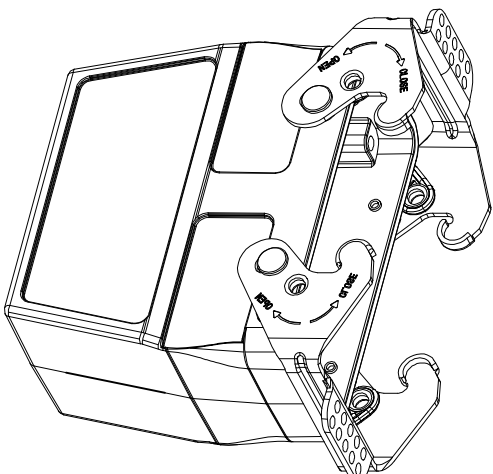

ITEM	NAME OF PART		NO. OF PART		Q'TY		MATERIAL		NOTE	
DWG.	SWL		DATE		2023.12.9		UNITS		MM	
CHK.			DATE				SCALE		1:1	
APP.			DATE				NAME		UL0-HC07-H16B-TEH-2L-XXX	
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司			DWGNO.							