



| Type                      | Thread size<br>(M/PG) |
|---------------------------|-----------------------|
| ULO-HC07-H16B-TEH-4B-M32  | M32                   |
| ULO-HC07-H16B-TEH-4B-M40  | M40                   |
| ULO-HC07-H16B-TEH-4B-PG21 | PG21                  |
| ULO-HC07-H16B-TEH-4B-PG29 | PG29                  |

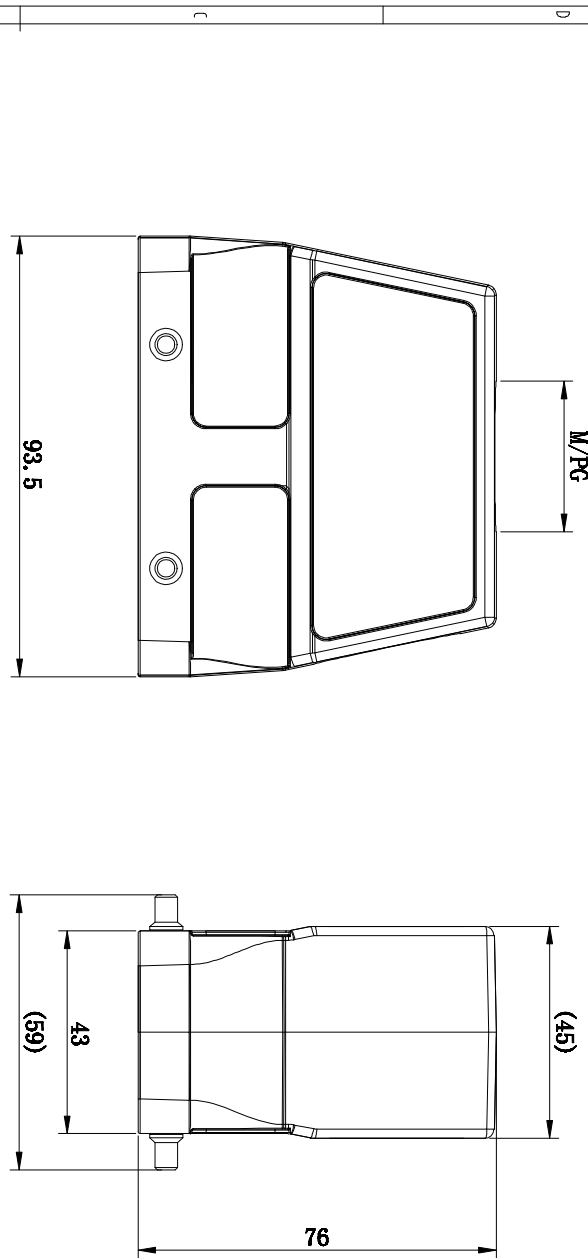

Technical specification:

1. Material: Aluminium die-cast
2. Surface: powder-coated
3. Colour: (grey)
4. Temperature range: -40℃ - +125℃
5. Degree of Protection: IP65  
(acc. to IEC 60529 for coupled connector)
6. Cable entry: top entry
7. Thread size: M/PG

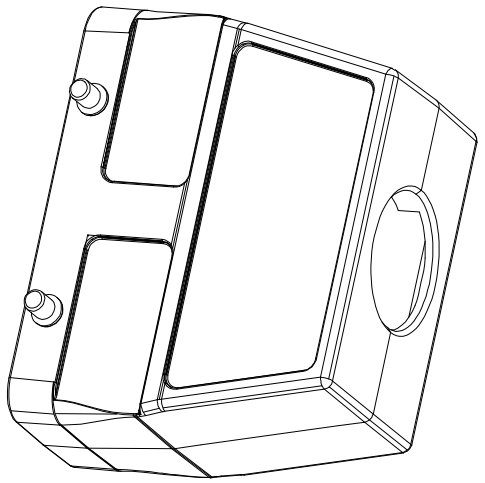

| ITEM                            | NAME OF PART | NO. OF PART | Q'TY                    | MATERIAL | NOTE |
|---------------------------------|--------------|-------------|-------------------------|----------|------|
| DWG.                            | SWL          | DATE        | 2023.12.9               | UNITS    | MM   |
| CHK.                            | DATE         | SCALE       | 1:1                     | A4       | 1/1  |
| APP.                            | DATE         | NAME        | ULO-HC07-H16B-TEH-4B-XX |          |      |
| NINGBO ULO ELECTRONICS CO.,LTD. |              |             | DWGNO.                  |          |      |
| 宁波欧路电子有限公司                      |              |             |                         |          |      |